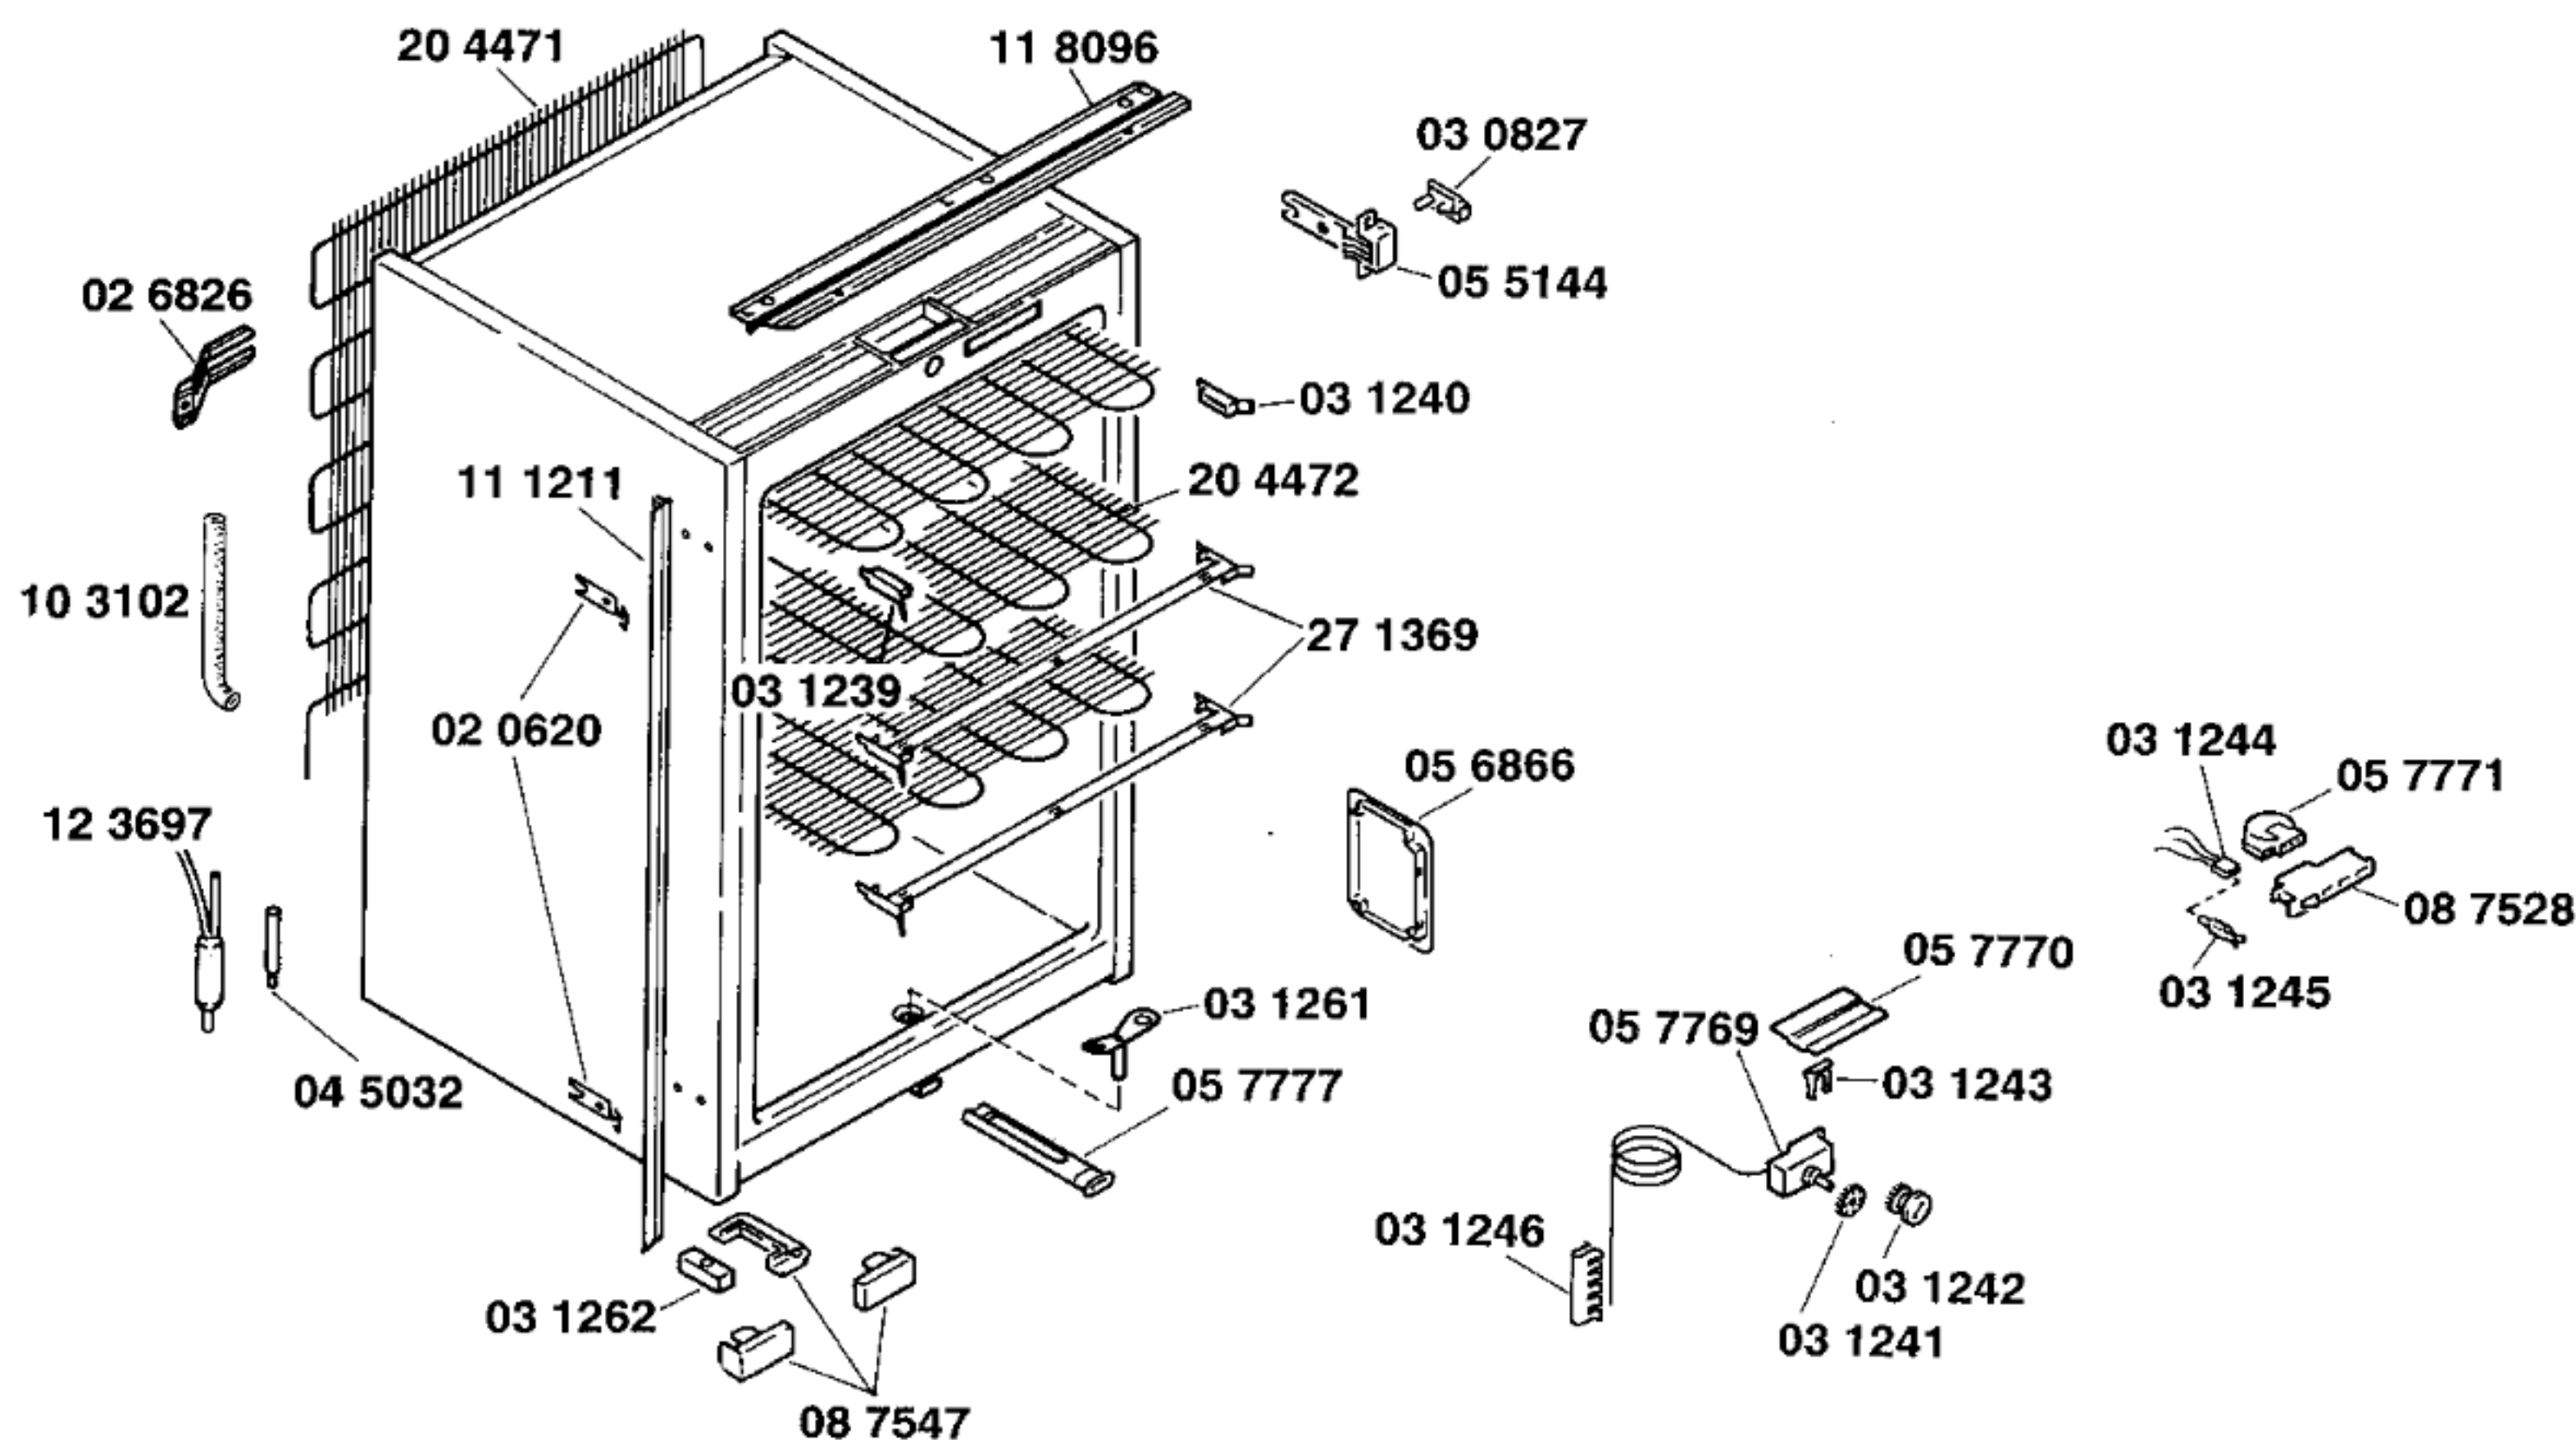



 Ident – Nummern – Konstante
3740


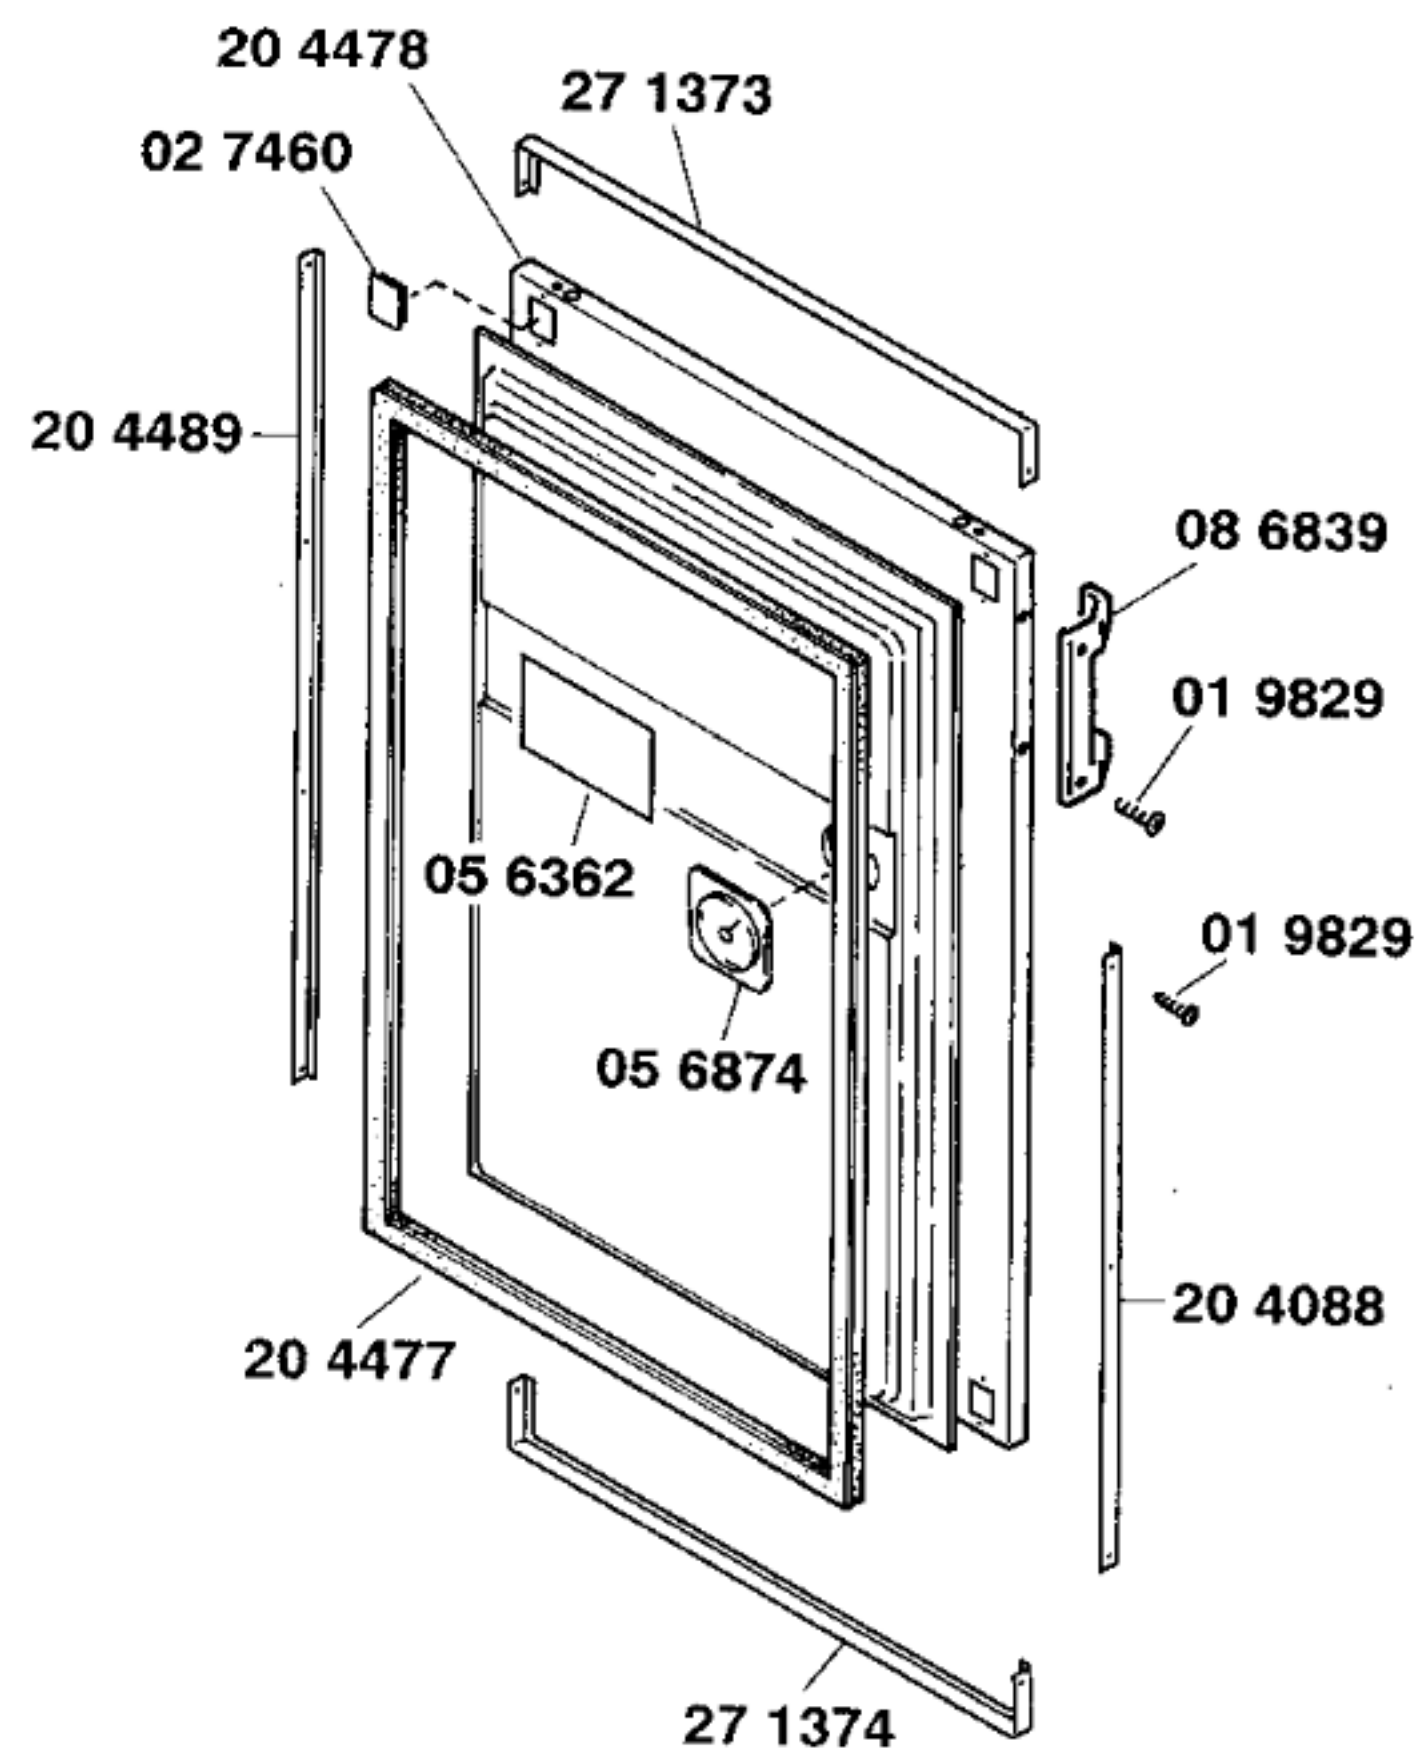
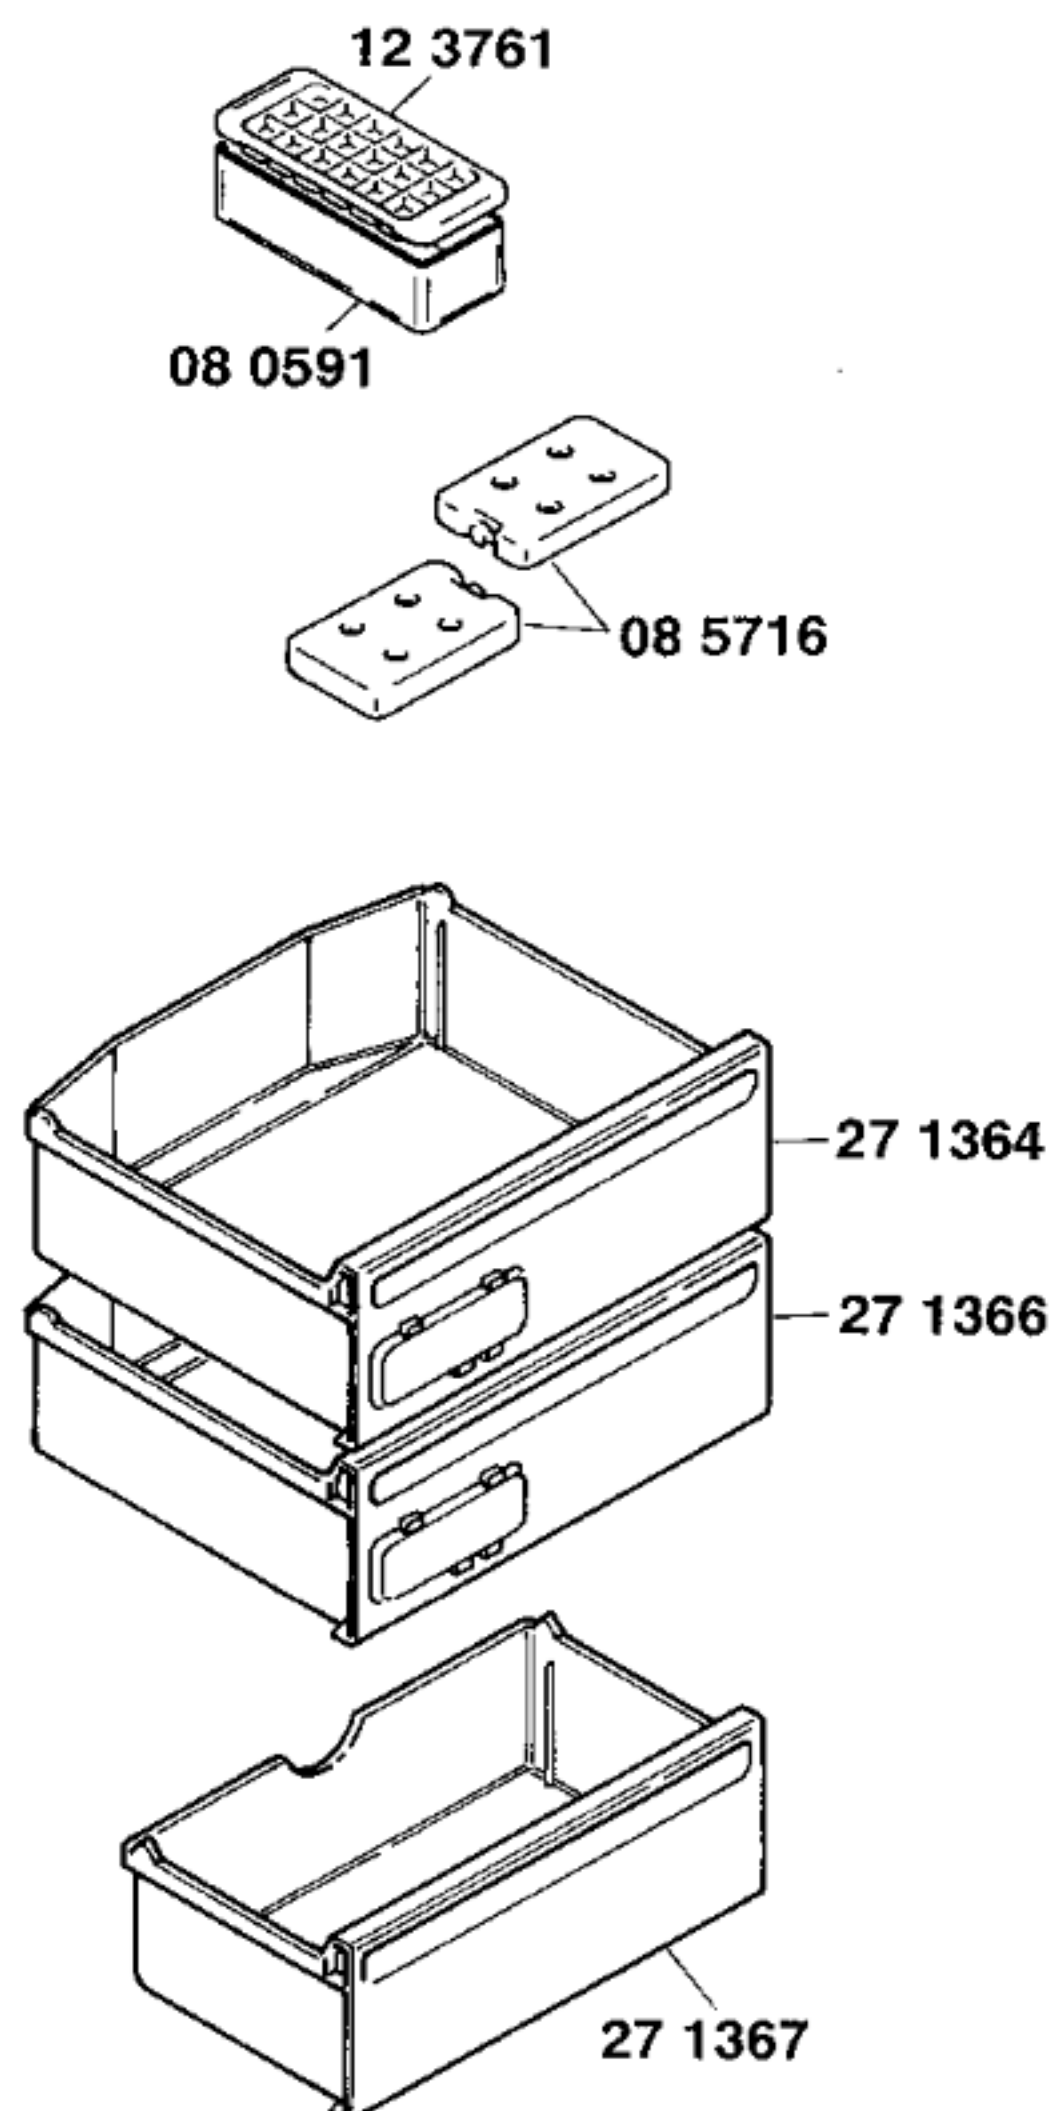
51 4219
Gebrauchsanweisung
(D,GB,F,I,NL,N,S,SF)
51 4221
Montageanleitung
(D,GB,F,I,NL,DK,N,
SF,E,S)
08 4136
Schraubensatz


Zubehör:

Dekorrahmen
GSZ1004, weiss
GSZ1005, braun

Ausgleichs-
blenden
braun:
KSZ1208, 37mm
KSZ1209, 41mm
KSZ1210, 56mm

Alu:
KSZ1211, 37mm
KSZ1212, 41mm
KSZ1213, 56mm

Ident – Nummern – Konstante
3740

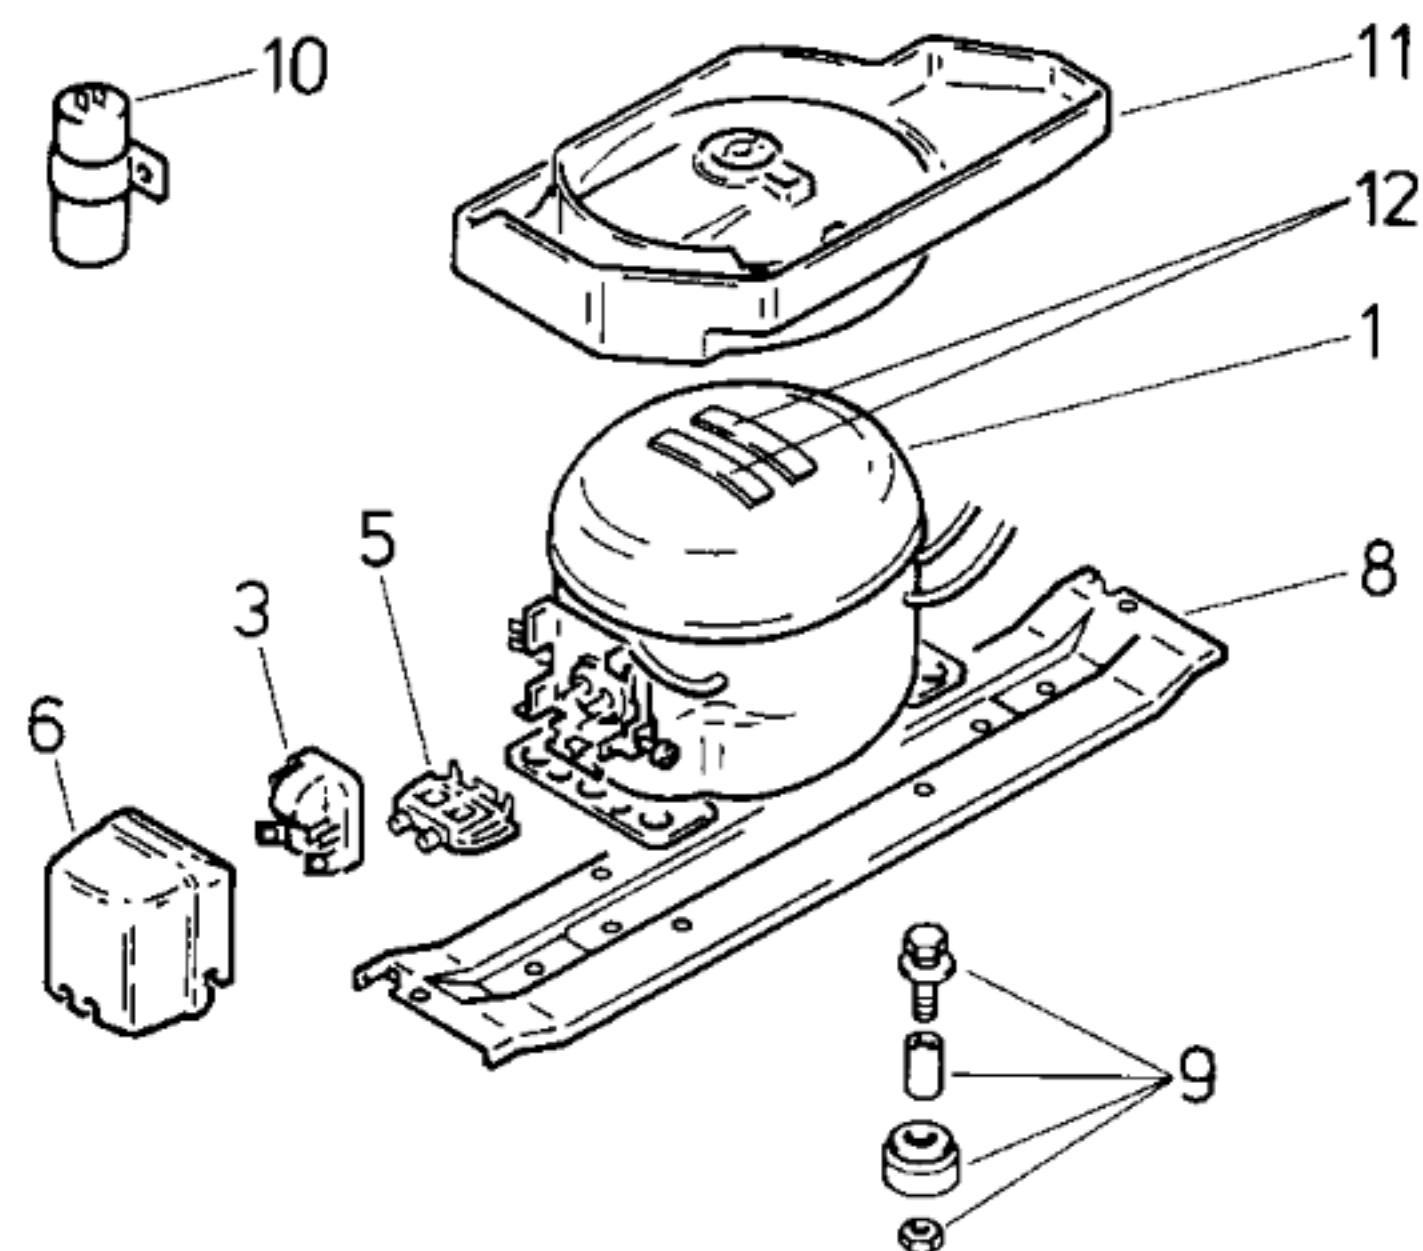Ident – Nummern – Konstante
3740

Pos.	Danfoss		
	TL 5 A		
1	14 0065		
2			
3	02 0108		
4			
5	02 7310		
6	05 1413		
7			
8	27 1375		
9	05 0166		
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss		
Typ/Type		TL 5 A		
Förderleistung/Delivery/Débit	l/h	V 914		
Anlaufstrom/Starting current/Cour. de démarrage	A	9,0		
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω 15,5		
	Hi/aux	Ω 16,8		
Temp.-Regler/Thermostat		WHF		
Typ/Type		TF57 SF2		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ °C	-25	-17	
Valeurs de commutation	„aus“	-33	-23	
	(„abtauen“ od.) „alarm“	-19,5	-13	
Füllmenge/Fill.quantity/Charge	R12	g	120	
Anschlußwert/Conn.load/Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Resistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		