


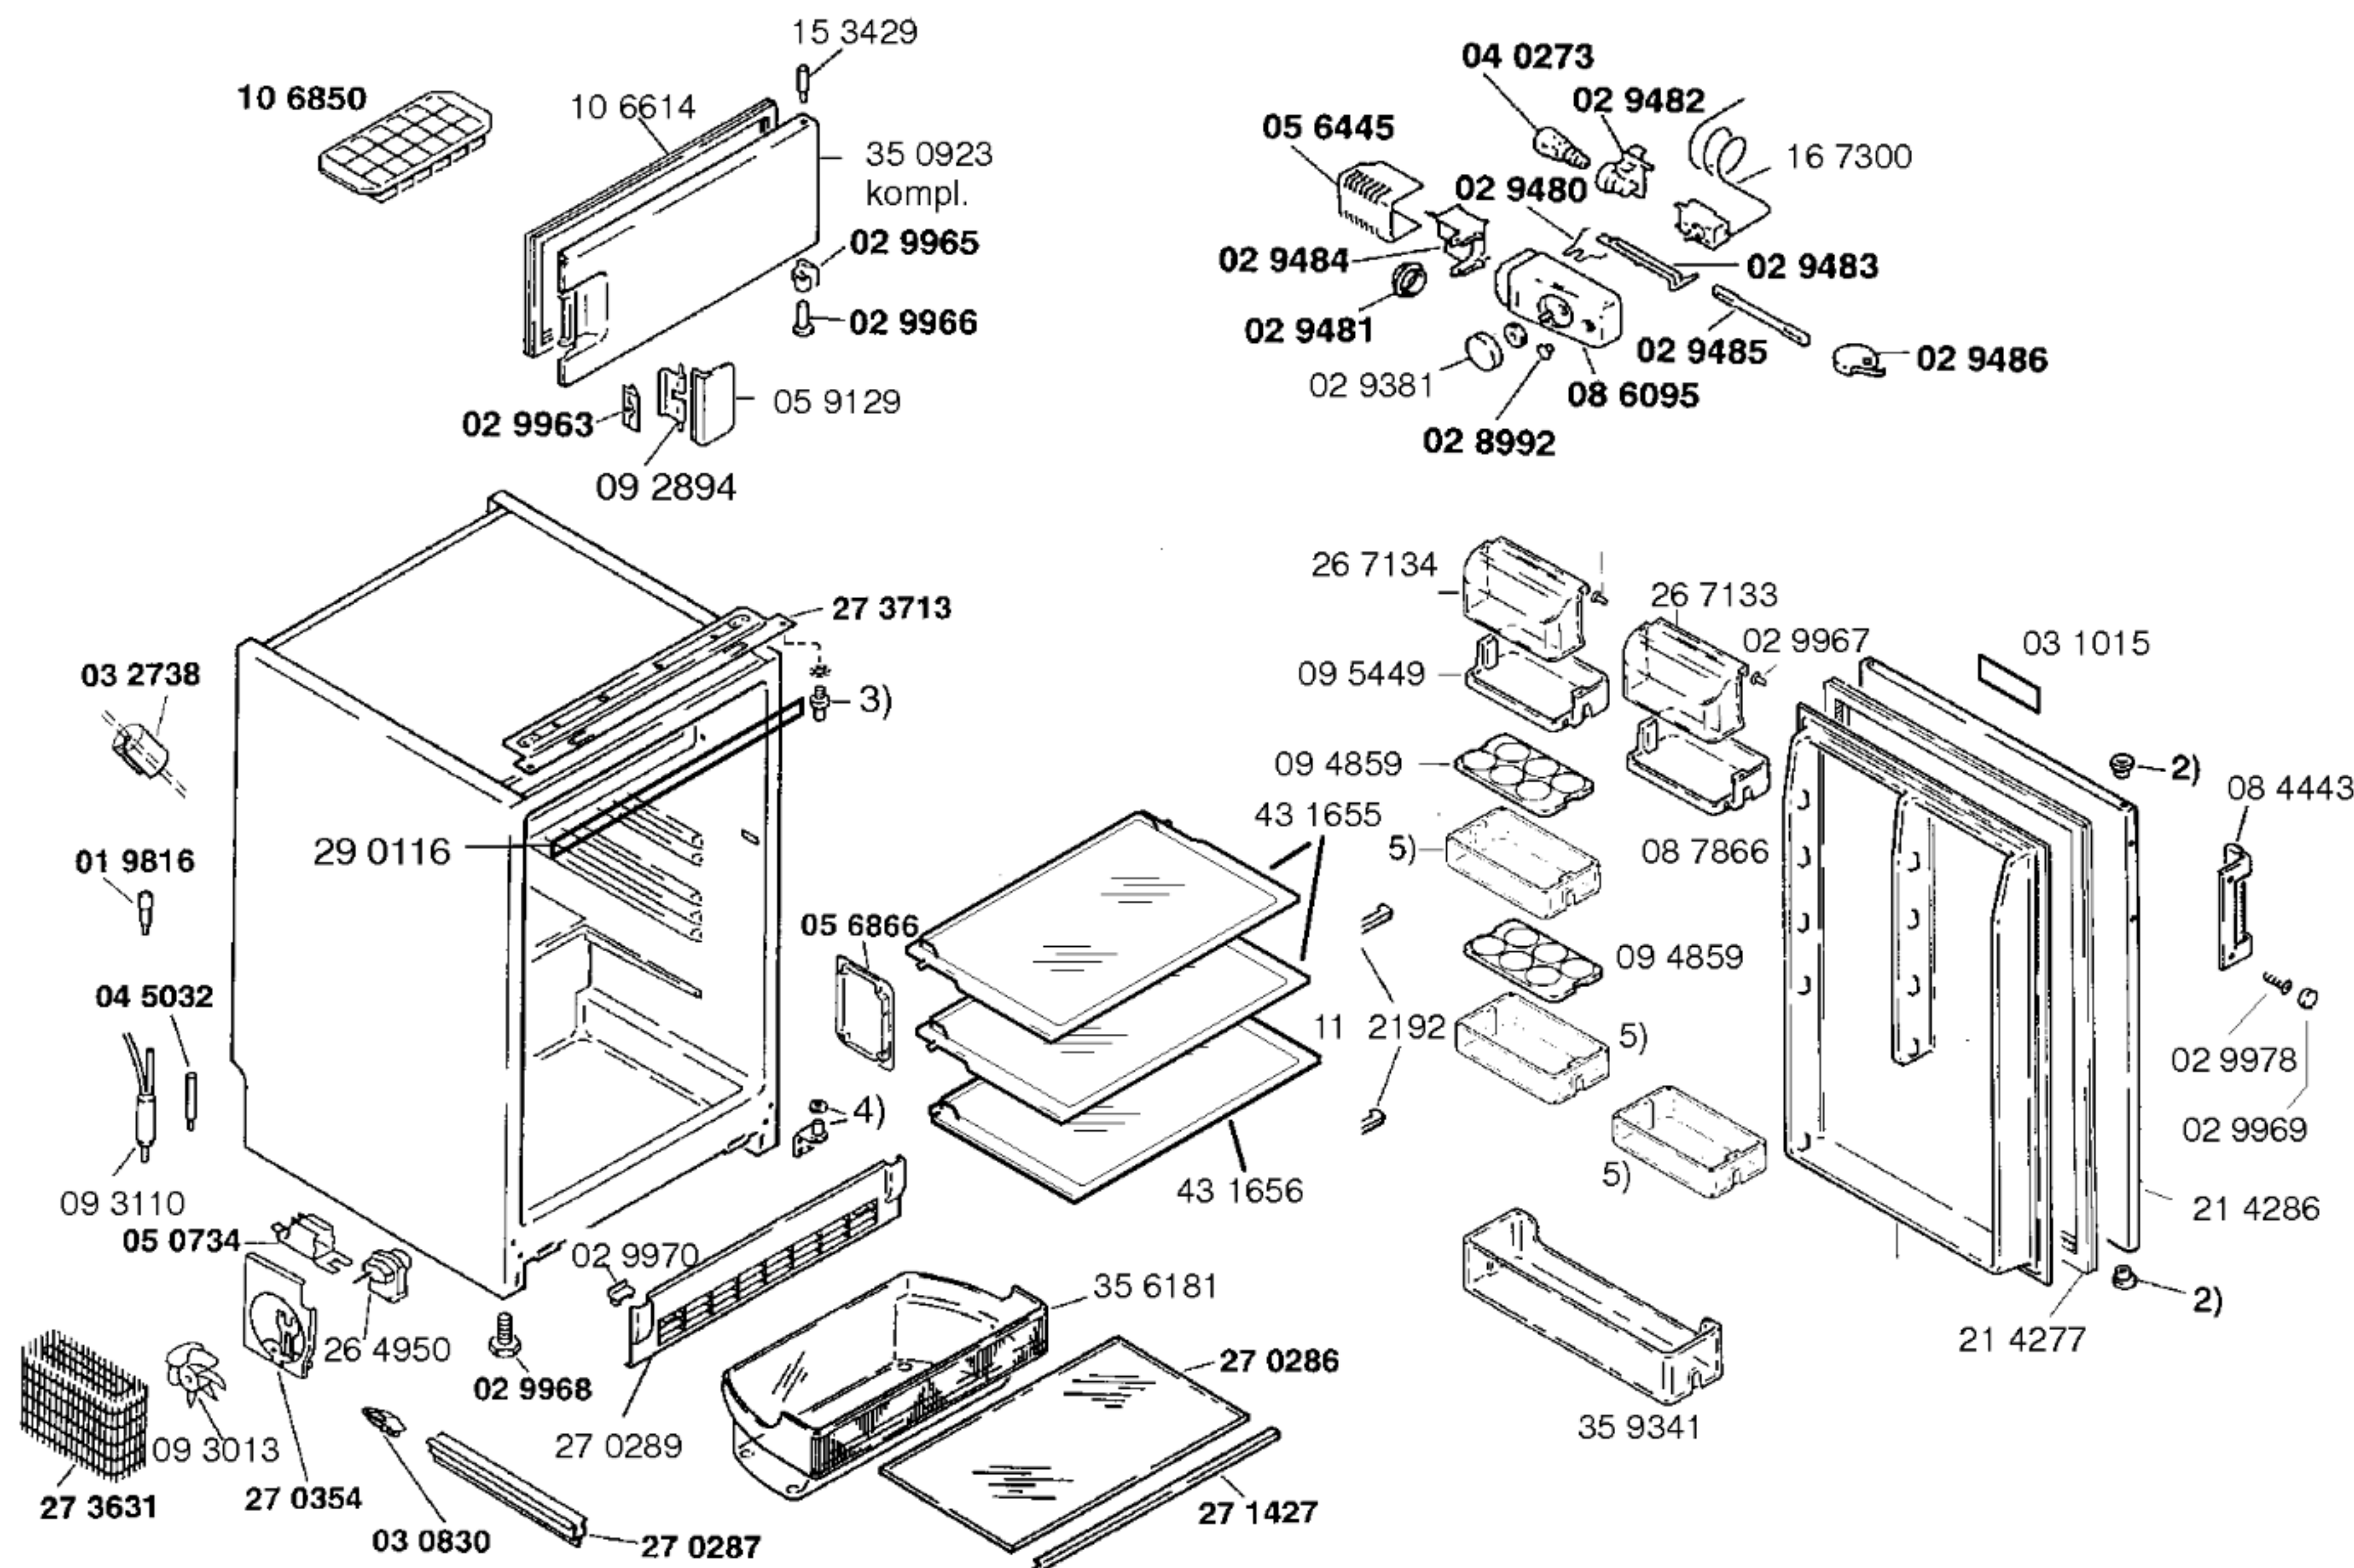


Gebrauchsanweisung
51 3591
(DE, EN, FR, IT, NL, SE, FI,
ES, PT,
DK, N)
Montageanweisung
51 9656
(DE, EN, FR, IT, NL, SE, FI,
ES, PT, DA, NO)

- 1) —
- 2) 01 9257
- 3) 15 2784
- 4) 16 2832
- 5) 26 7135

Zubehör:

Dekorrahmen
KZ10360, braun
KZ10370, Aluminium
KZ10390, weiss

Sockel
KZ11120

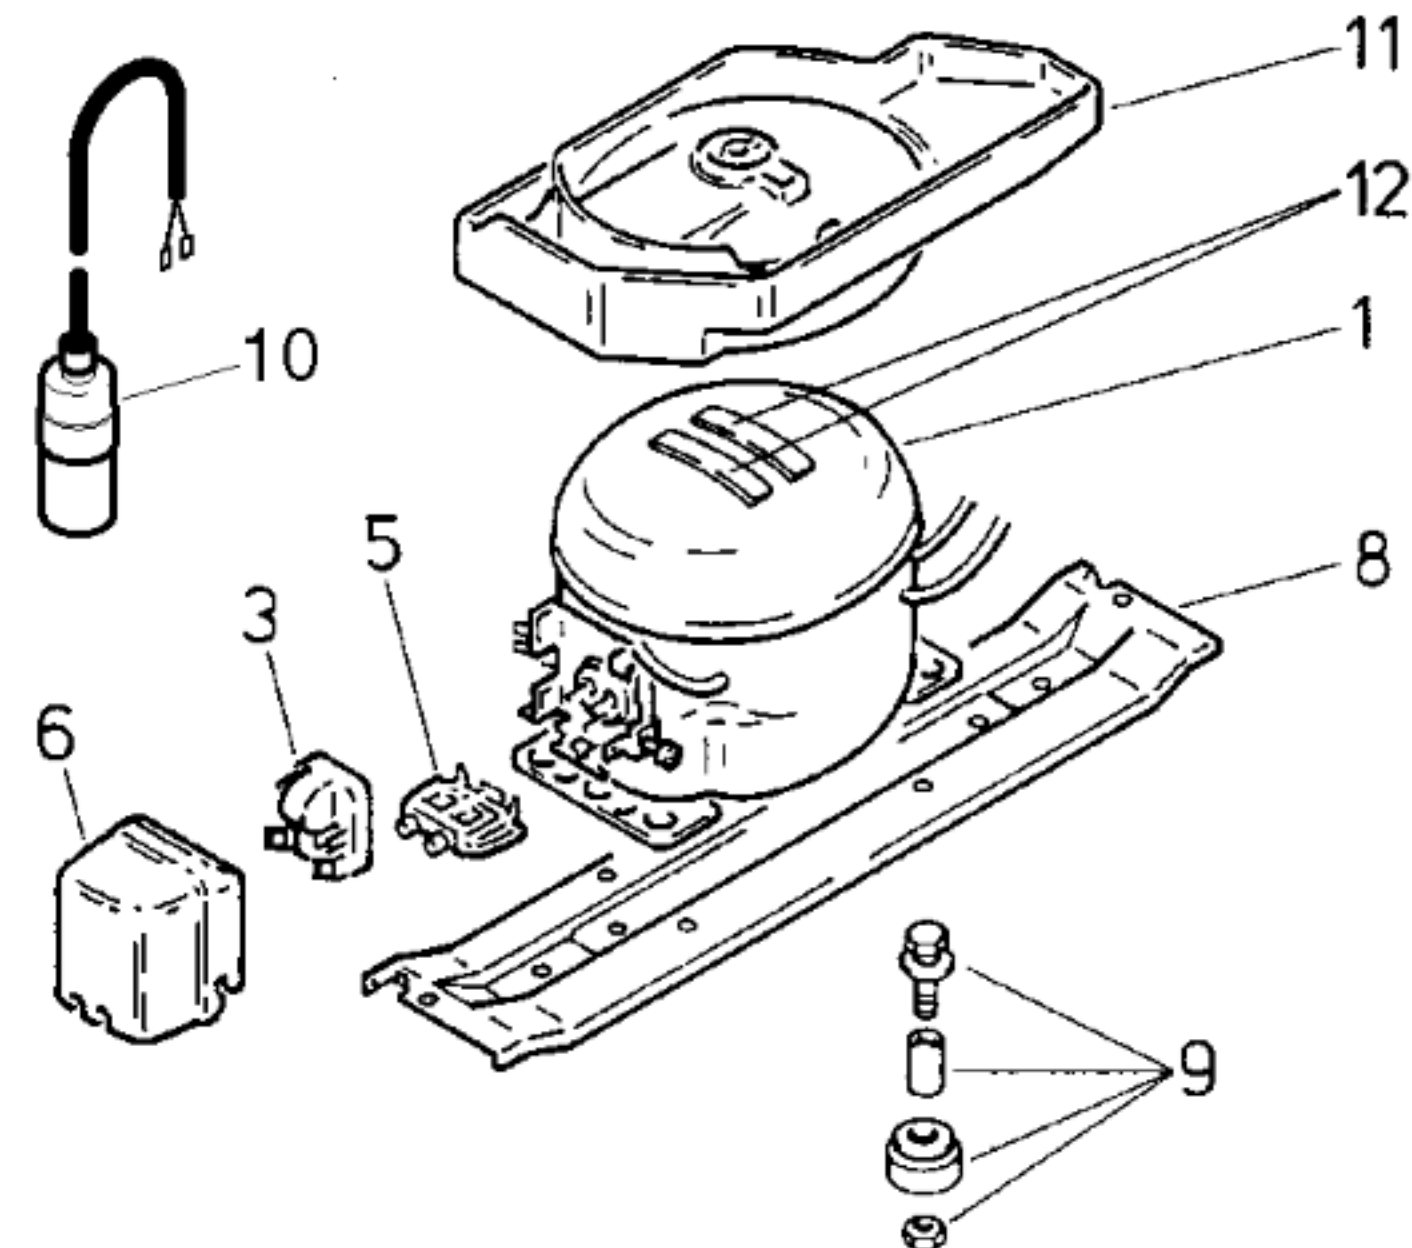

Pos.	V01	V02	
	Danfoss	Goldstar	
	TLES 7 K	NDA69NAEM	
1	14 1903	141999	
2			
3	15 1055	17 0743	
4			
5	15 0760	17 0745	
6	15 1072	17 0744	
7			
8	27 0291	27 0291	
9	05 0166	050166	
10	05 9467		
11	36 5099	36 5099	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss	Goldstar	
Typ/Type		TLES 7 K	NDA69NAEM	
Förderleistung/Delivery/Débit		l/h	1168	
Anlaufstrom/Starting current/Cour de démarrage		A	8,8	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	18,9	
		Hi/aux Ω	15,3	
Temp.-Regler/Thermostat				
Typ/Type				
Reglerstellung/Position				
Schaltwerte/Switching values/		„ein“	°C	
Valeurs de commutation		„aus“		
		(„abtauen“ od.)	„alarm“	
Füllmenge/Fill.quantity/Charge				
		R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée				
		W	78	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild