




07 4445


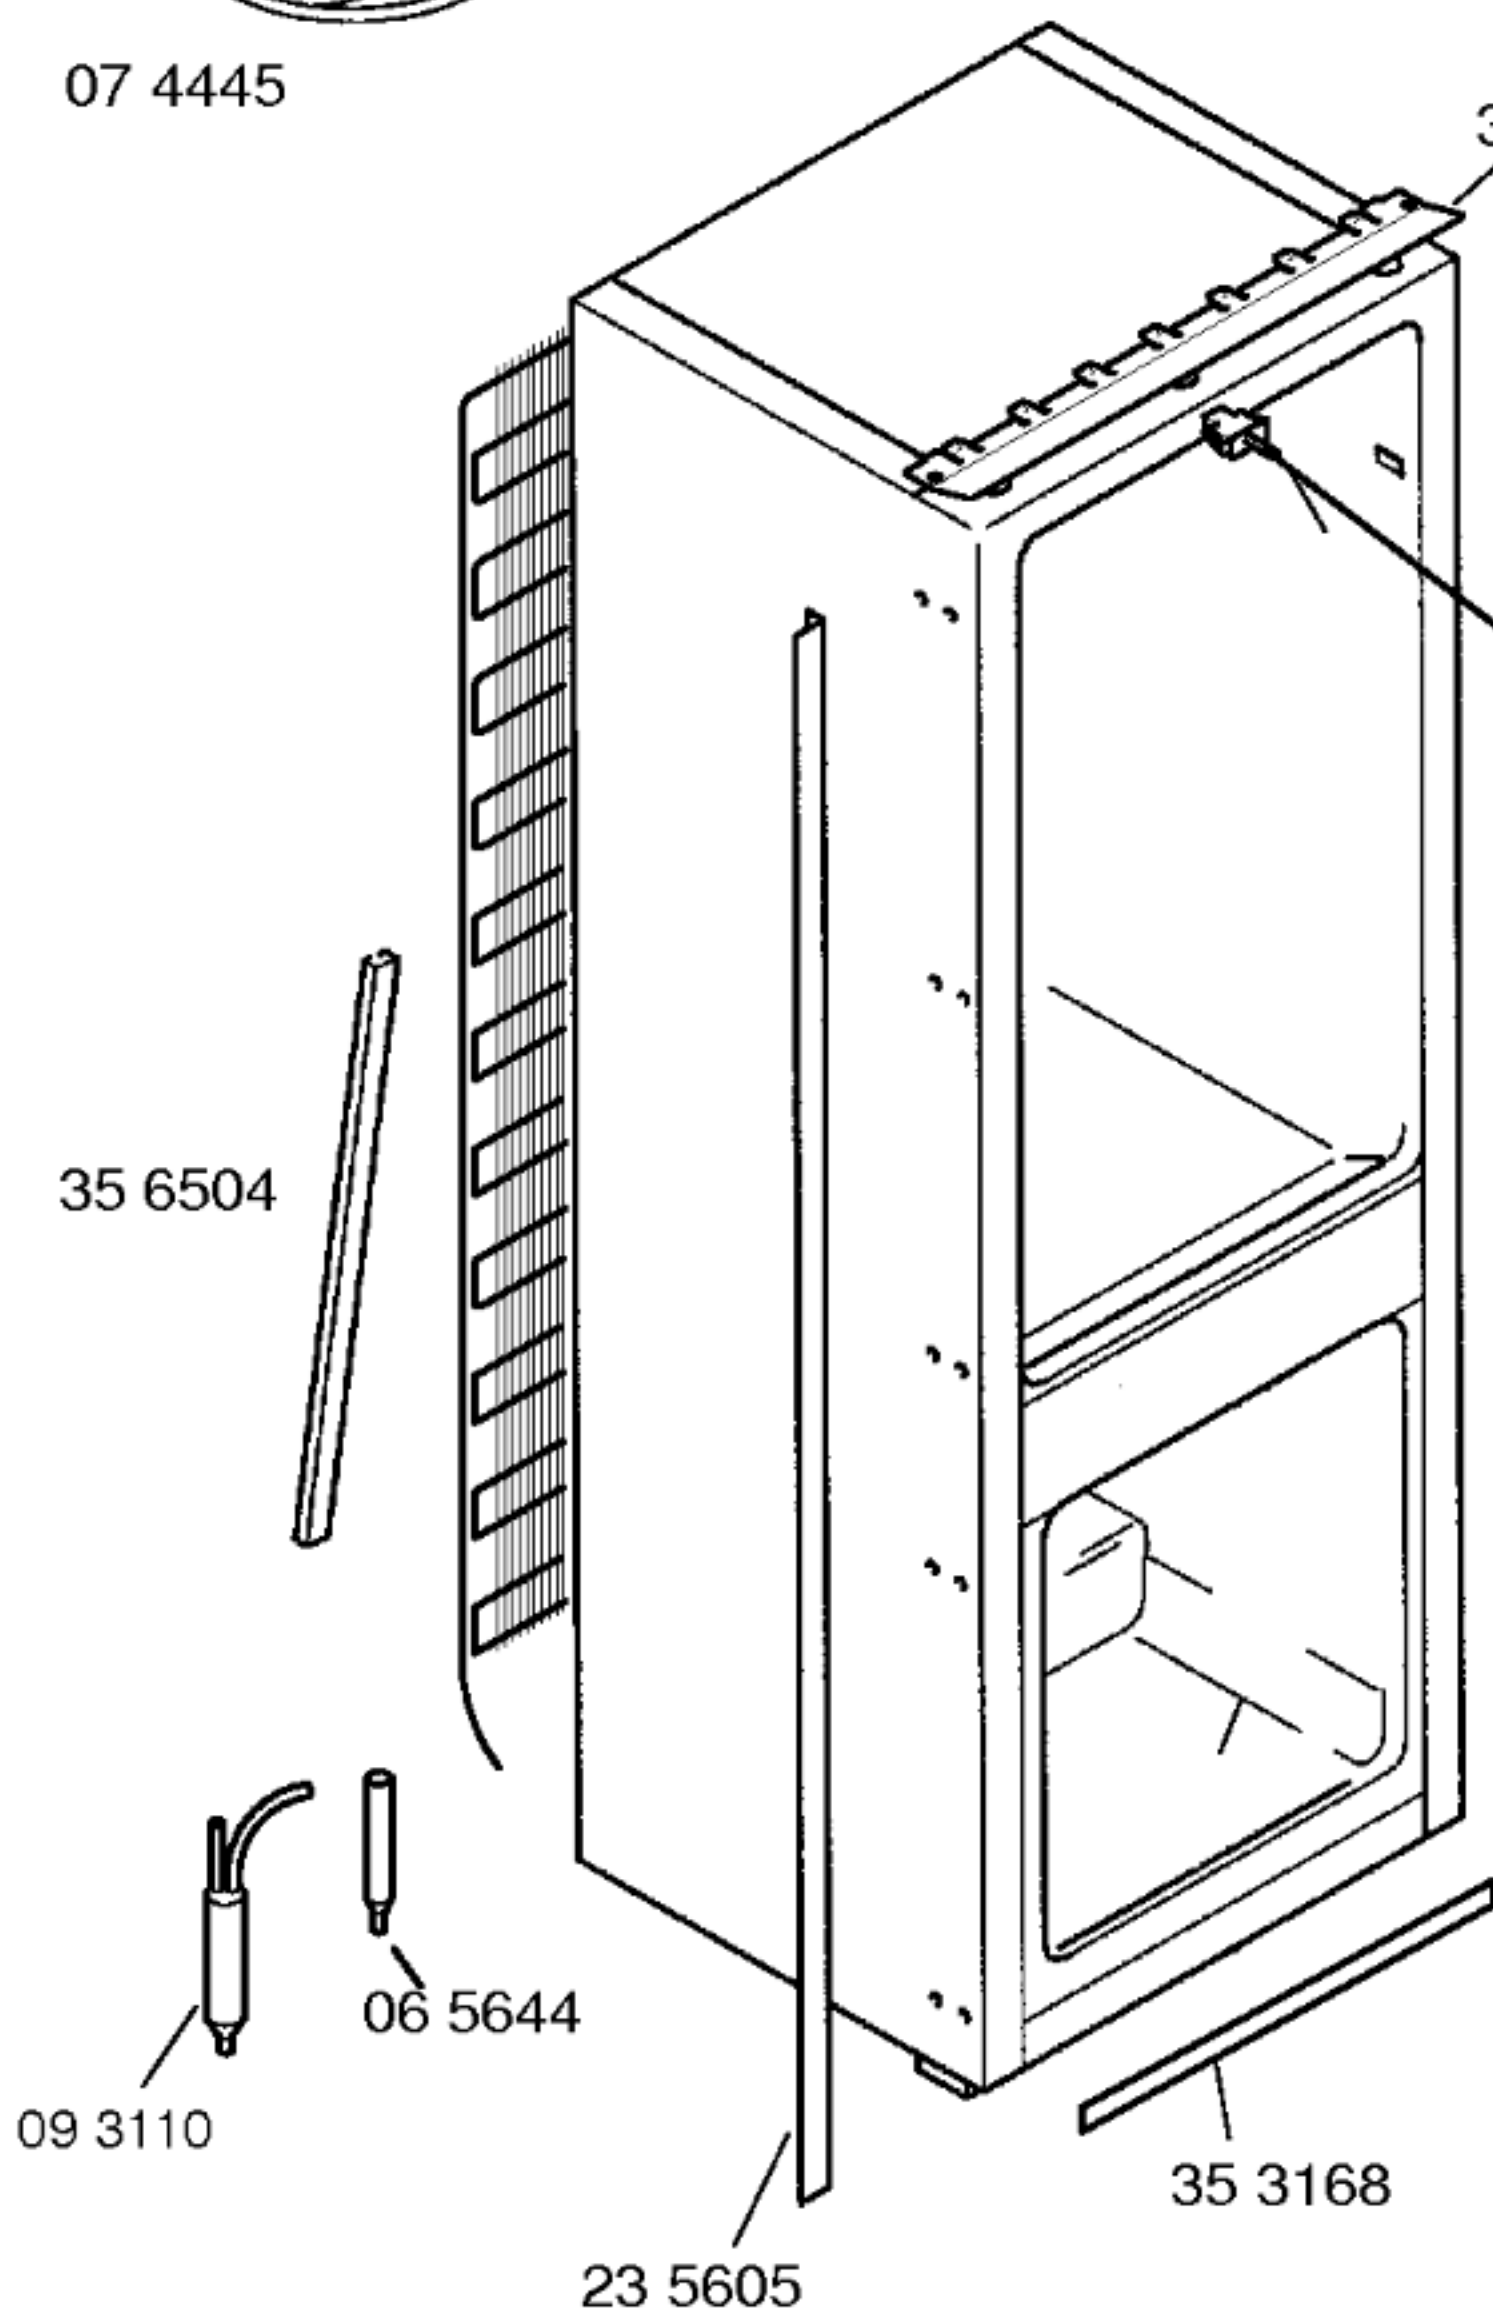


35 2476


48 1147
Set

16 9300

48 1147
Set

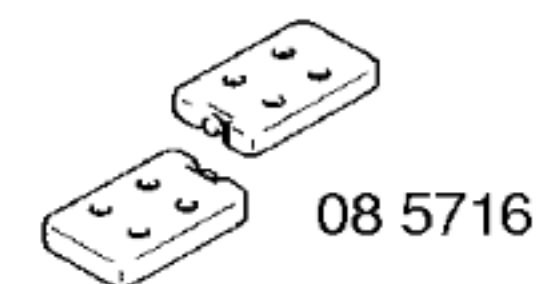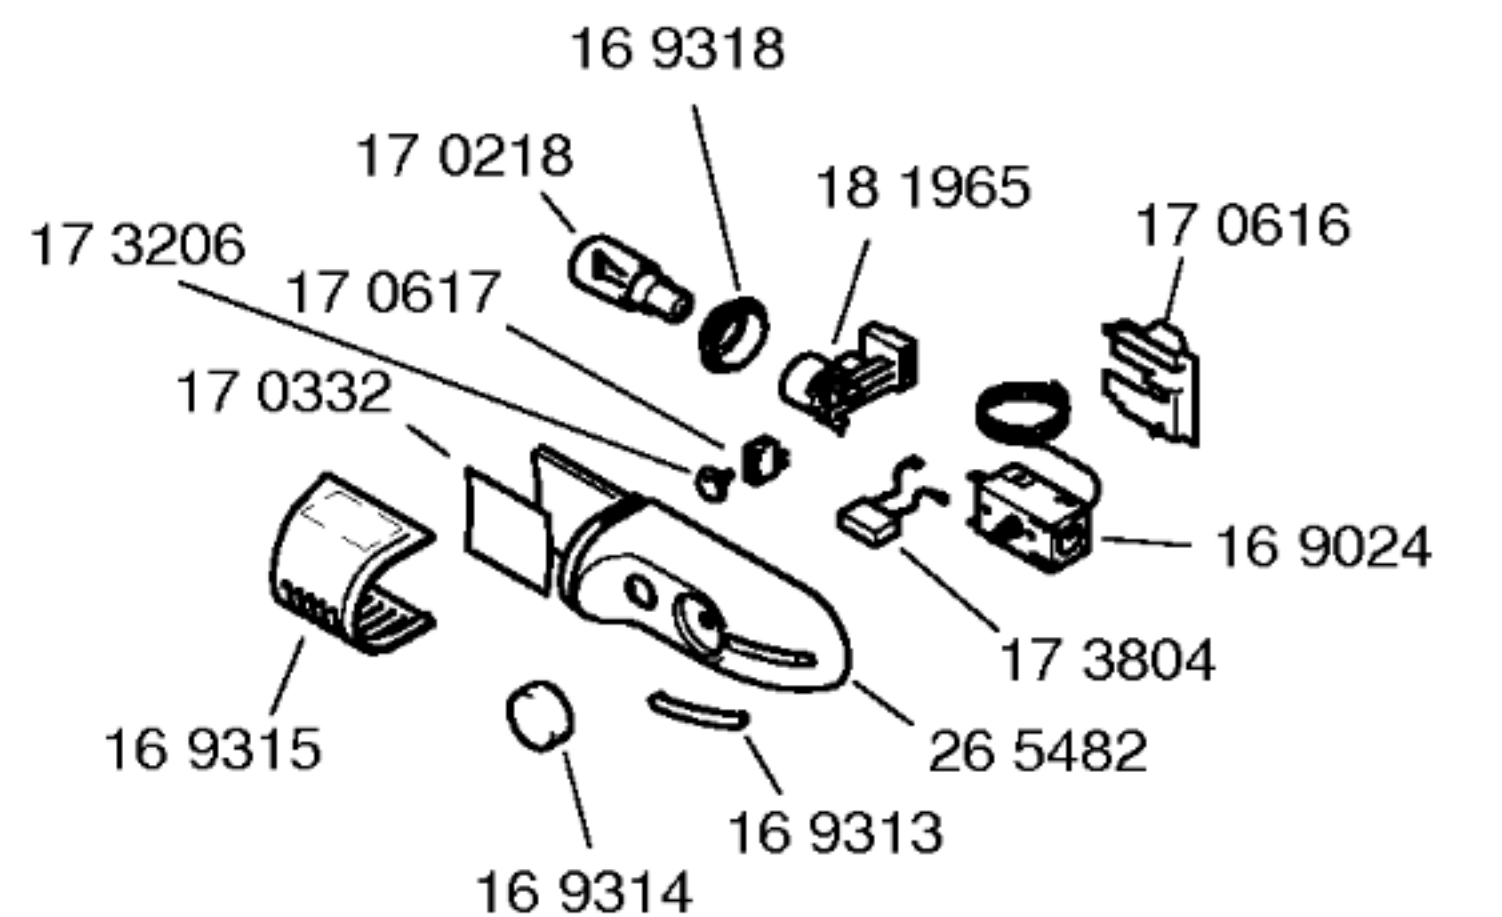

08 5716

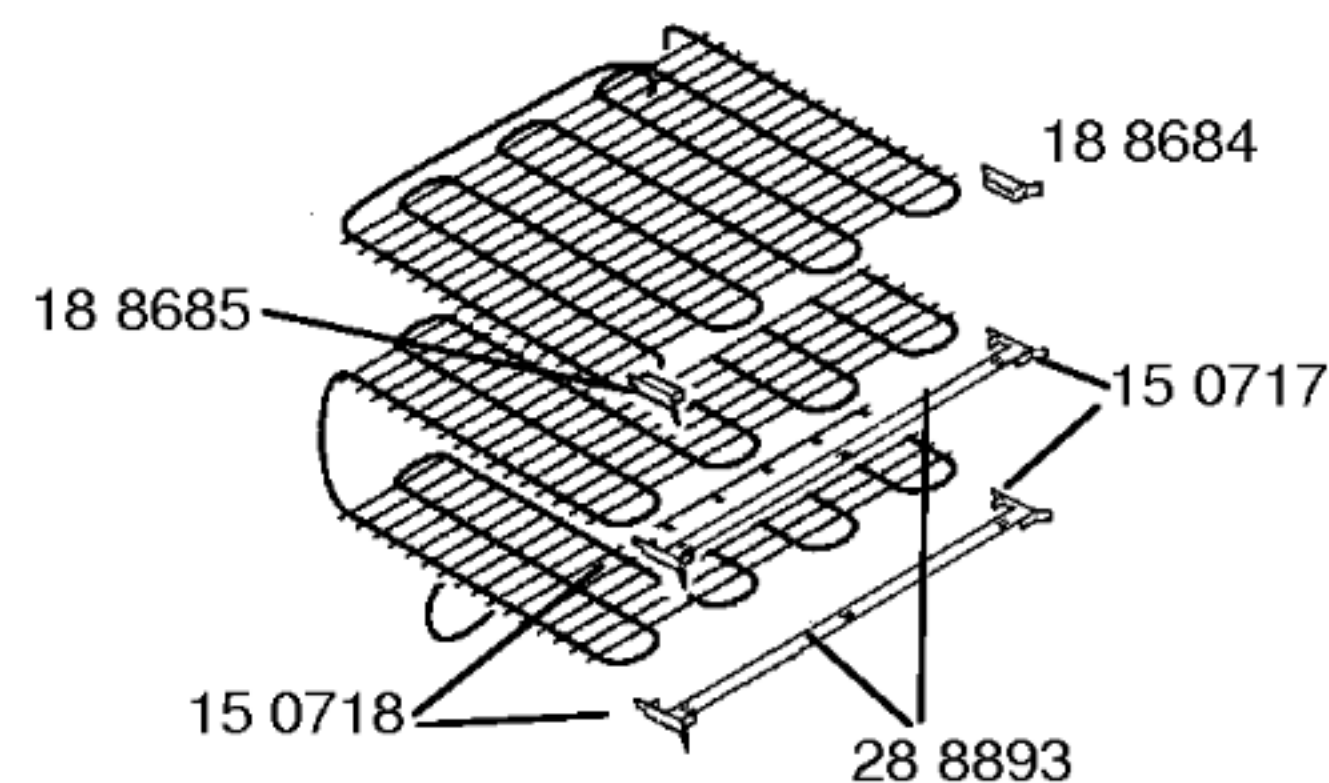

10 6850





Mat. - Nr. - Konstante
3740


Gebrauchsanweisung
58 2116
(D,GB,F,I,NL,S,E,DK,N,,SF)

Montageanleitung
52 2494
(D,GB,F,I,NL,S,E,DK,N,,SF)

Befestigungssatz
26 6910

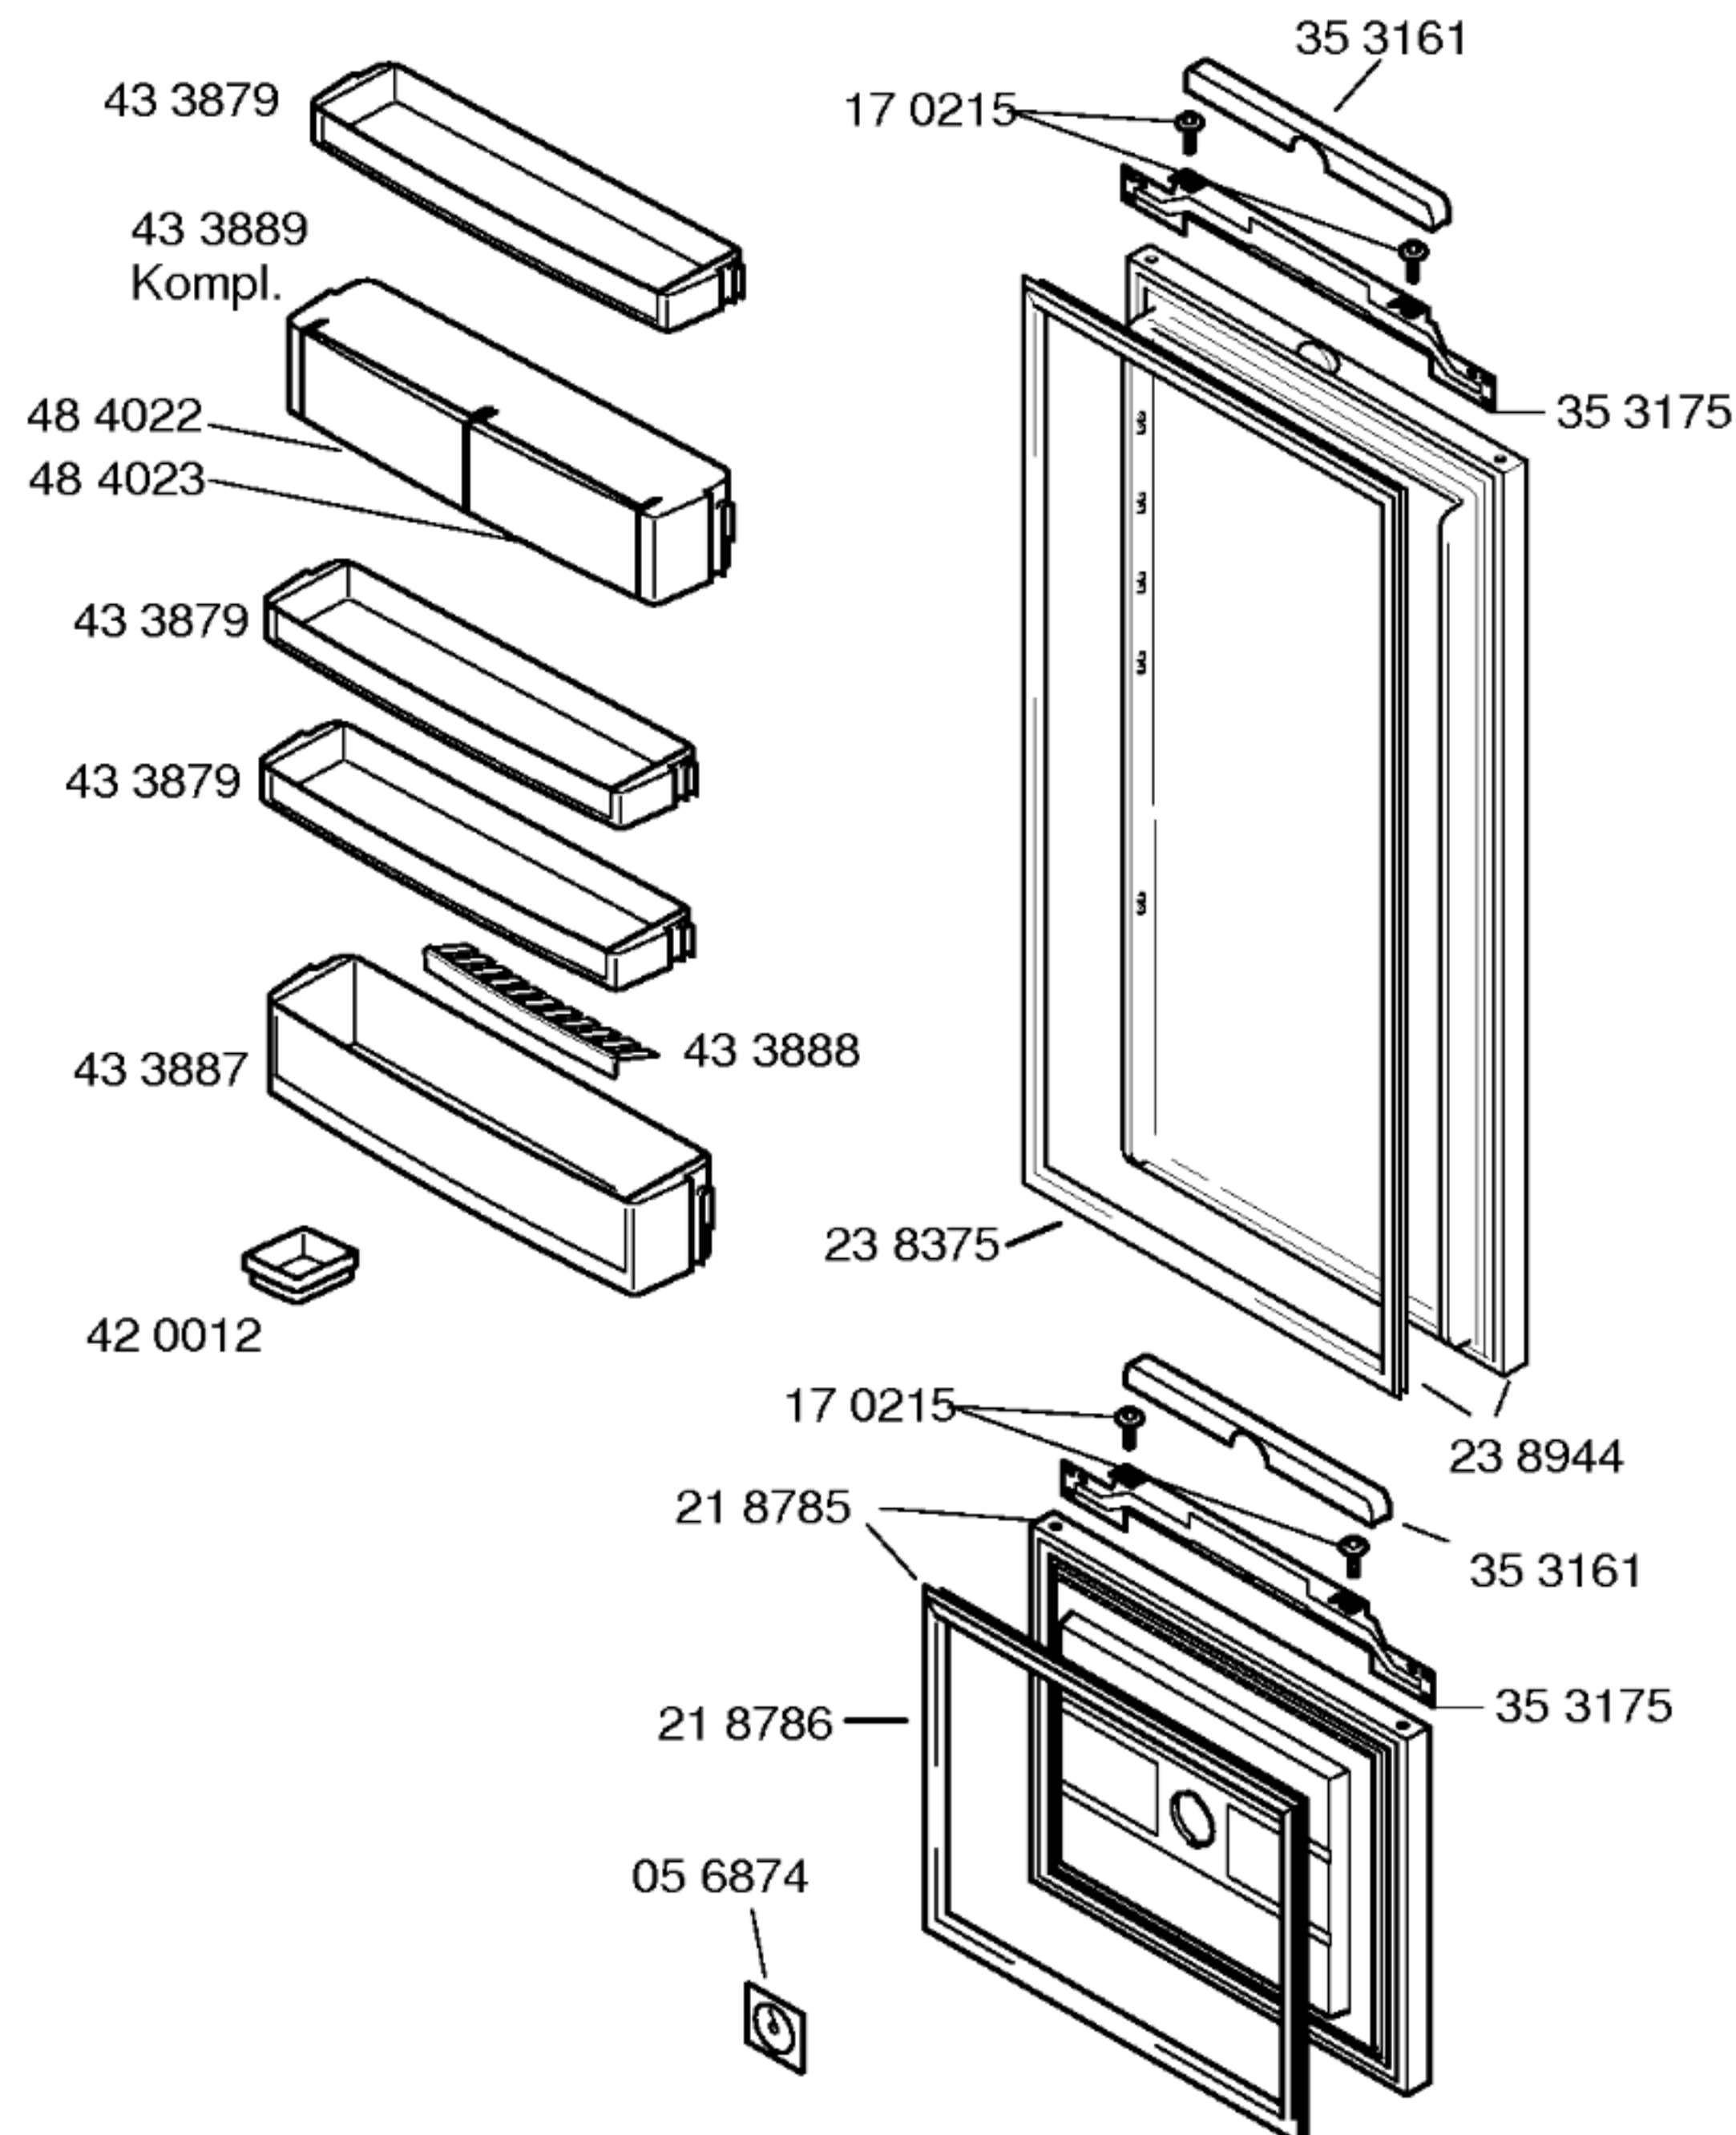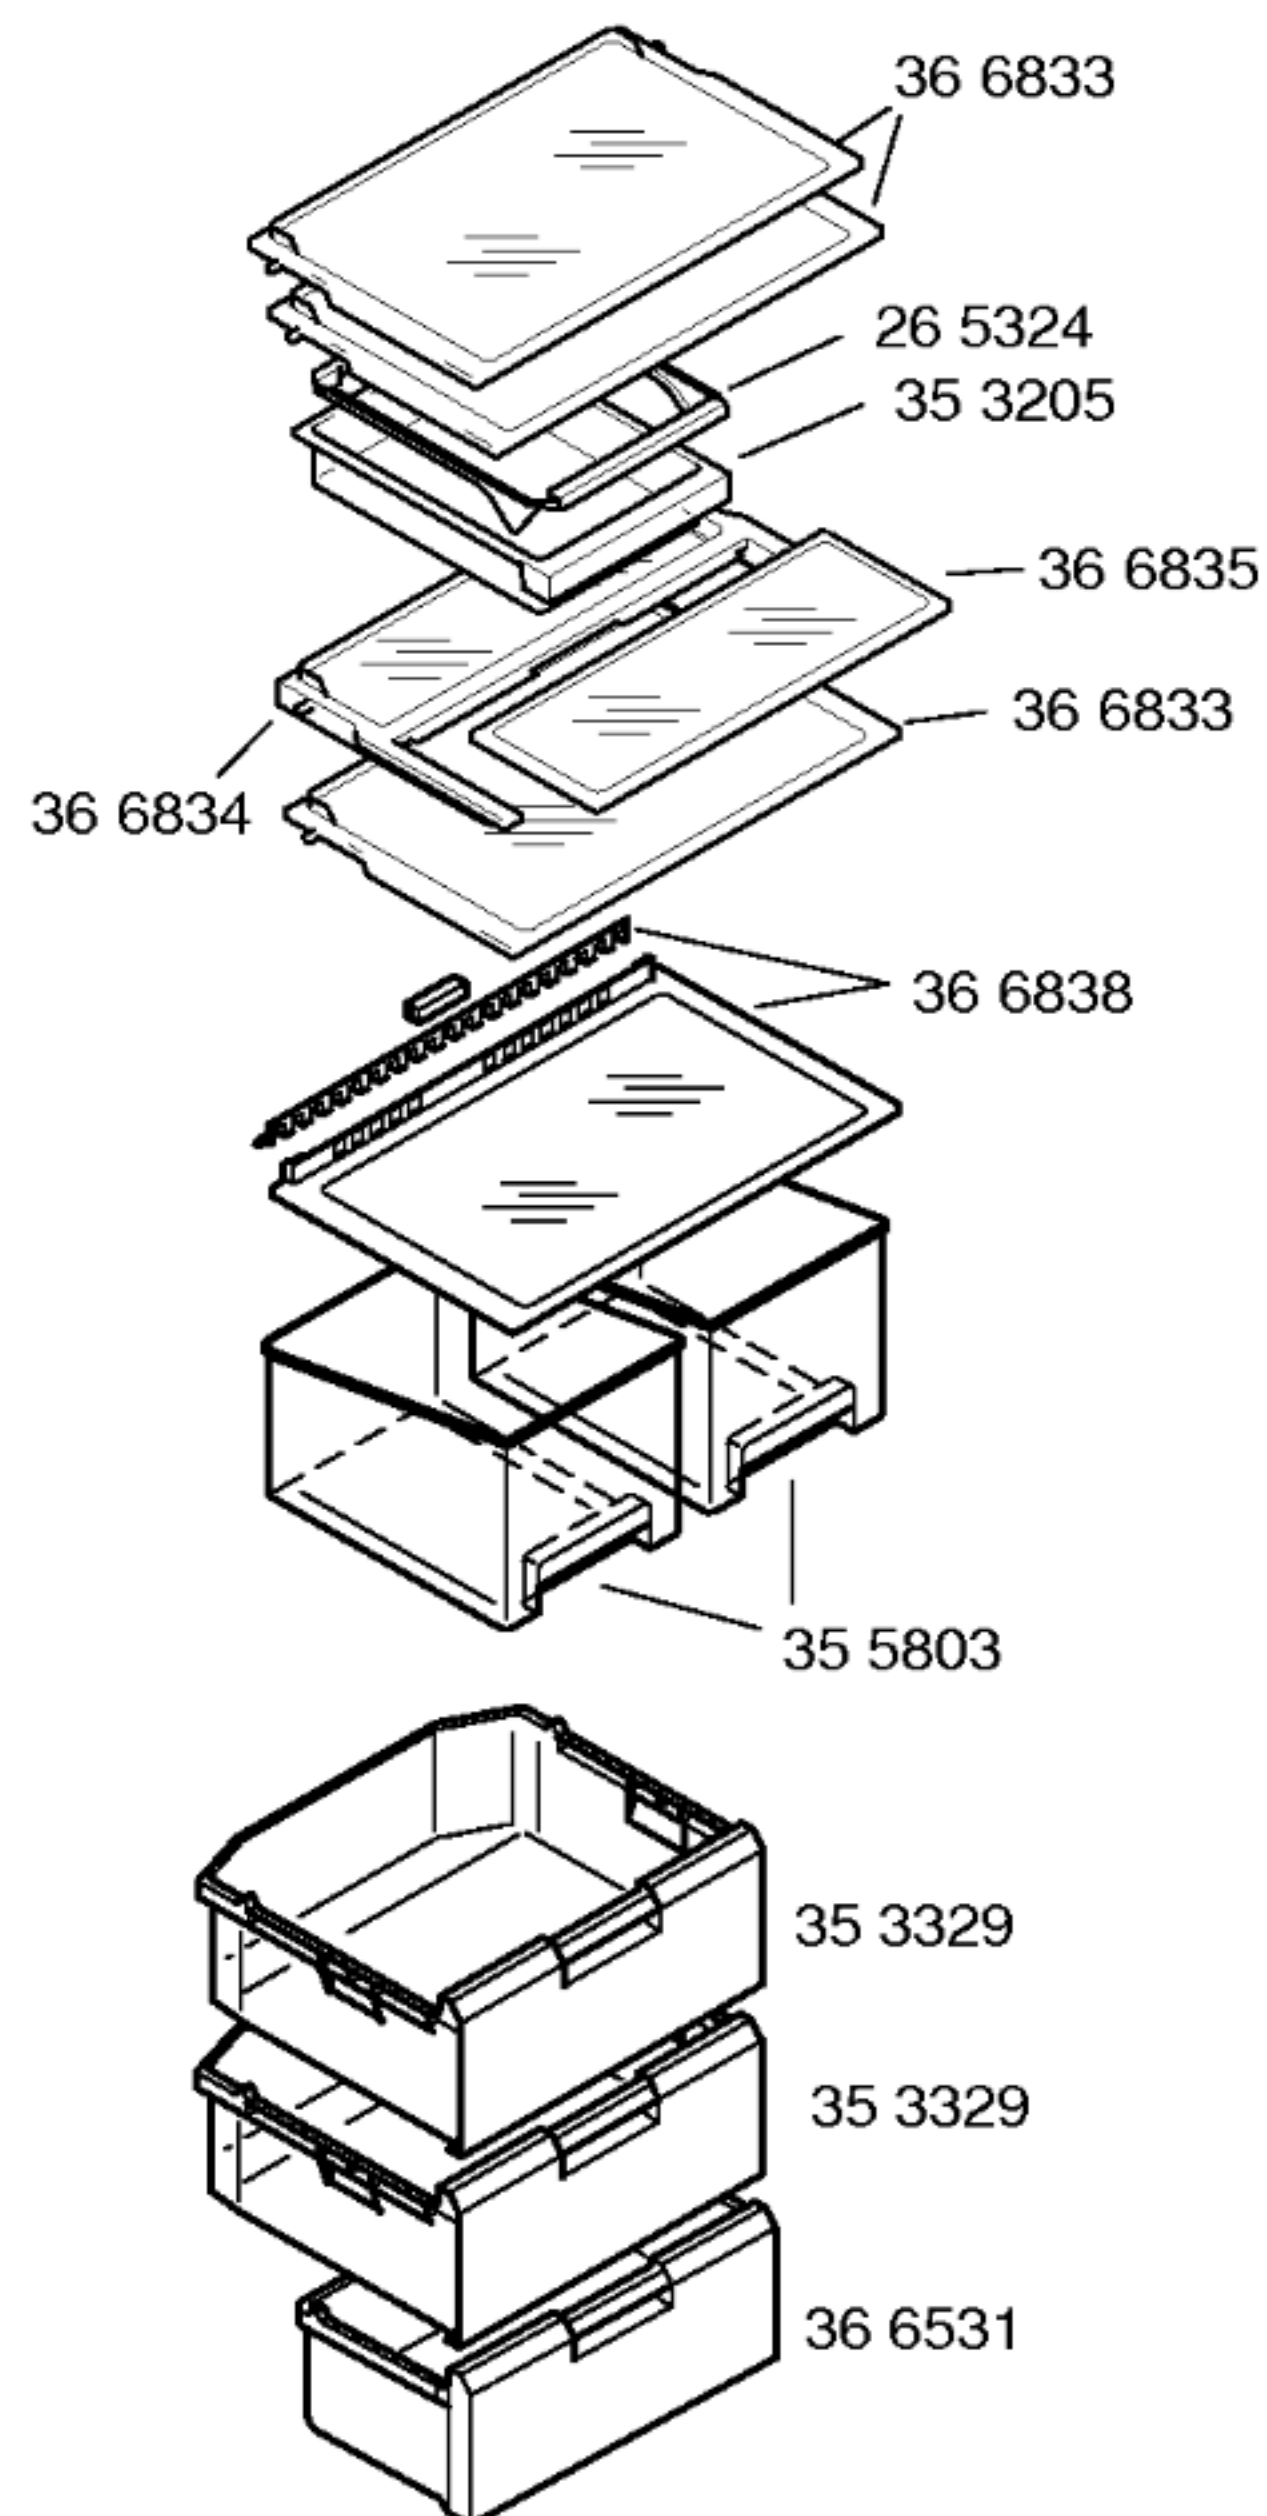

Mat. – Nr. – Konstante
3740

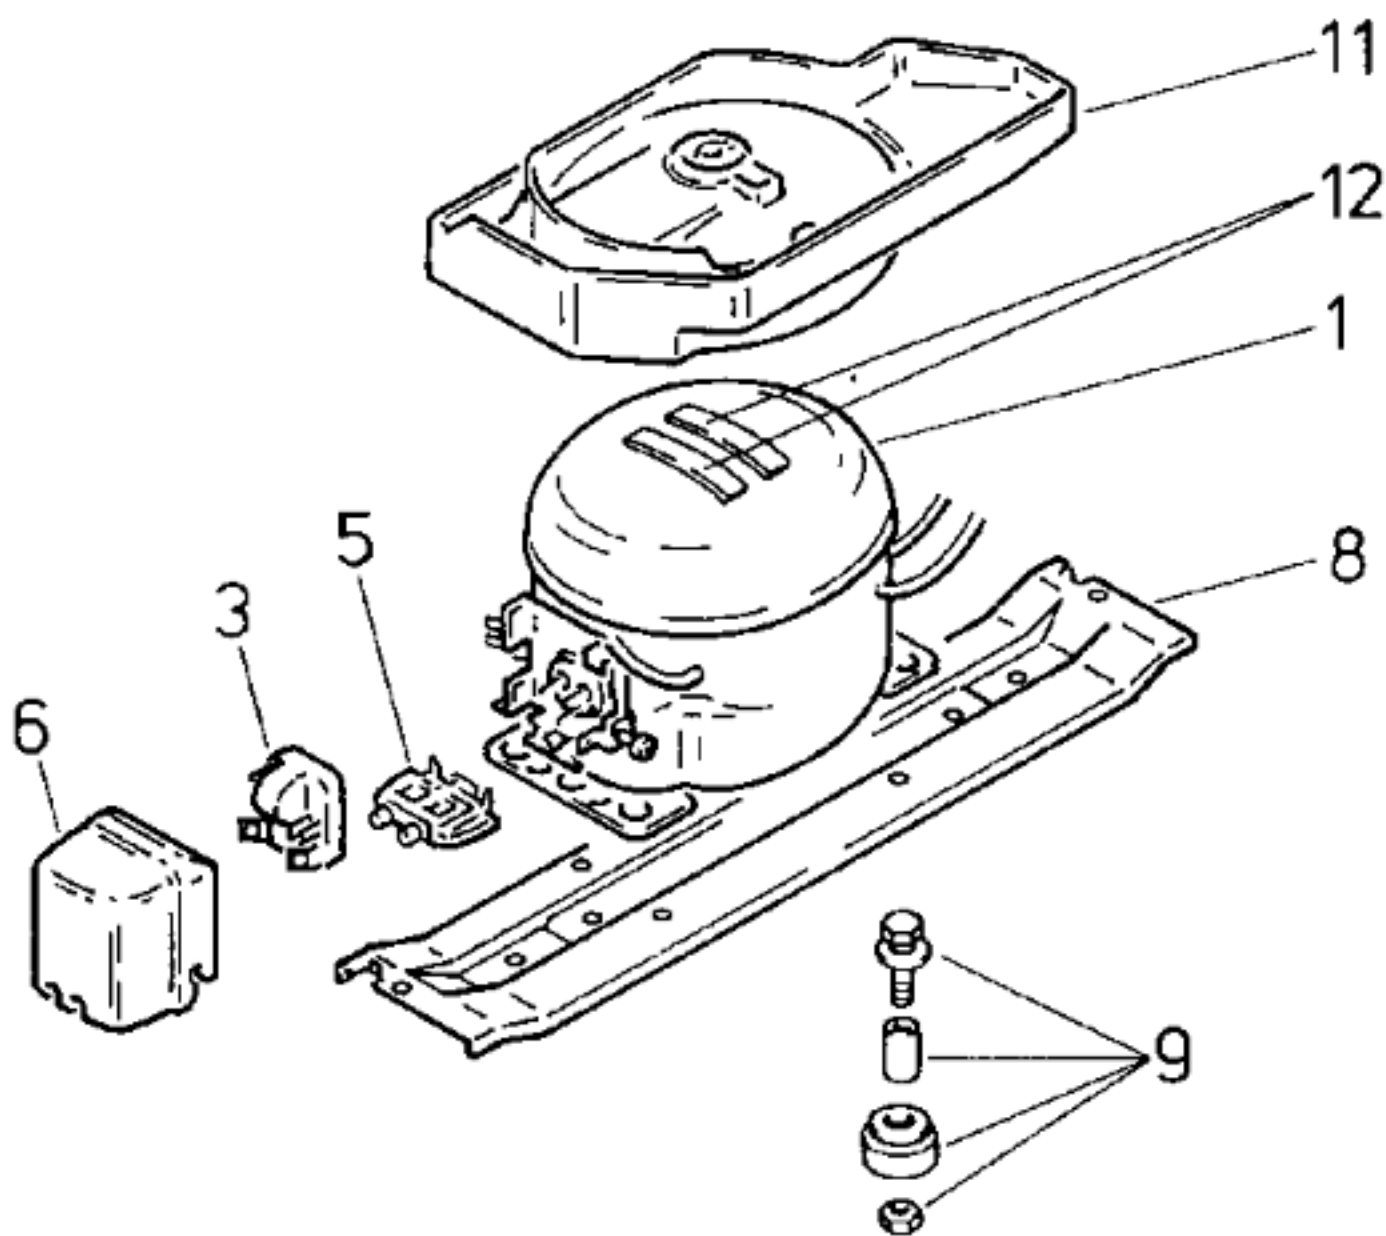

Pos.	V01, V02		
	Matsushita		
	DC125 E		
1	141965		
2			
3	17 2967		
4			
5	16 2549		
6	16 6782		
7			
8	28 1825		
9	05 0166		
10			
11	26 6624		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		DC125E		
Förderleistung/Delivery/Débit		l/h	2246	
Anlaufstrom/Starting current/Cour. de démarrage		A	9,2	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	12,1	
		Hi/aux Ω	13,8	
Temp.-Regler/Thermostat		RCO K59		
Typ/Type		KER		
Reglerstellung/Position			kalt	warm
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	+4,5	+4,5
Valeurs de commutation		„aus“	-32,0	-21
		(„abtauen“ od.)	„alarm“	
Füllmenge/Fill.quantity/Charge		R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée			W	120
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance			Ω	
Leistung/Power/Puissance			W	
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance			Ω	
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance			Ω	
Spannung/Voltage/Tension			V	

* siehe Typenschild