


**BOSCH**

GSU2606/01-V01
GSU2606CH/01-V02
GSU2606GB/01-V03

GSU2606/42-V04
GSU2606CH/42-V05
GSU2606GB/42-V06

GSU2606/43-V07
GSU2606CH/43-V08
GSU2606GB/43-V09

KÜHL-,GEFRIERGERÄTE
Gefrierschränke, Stand

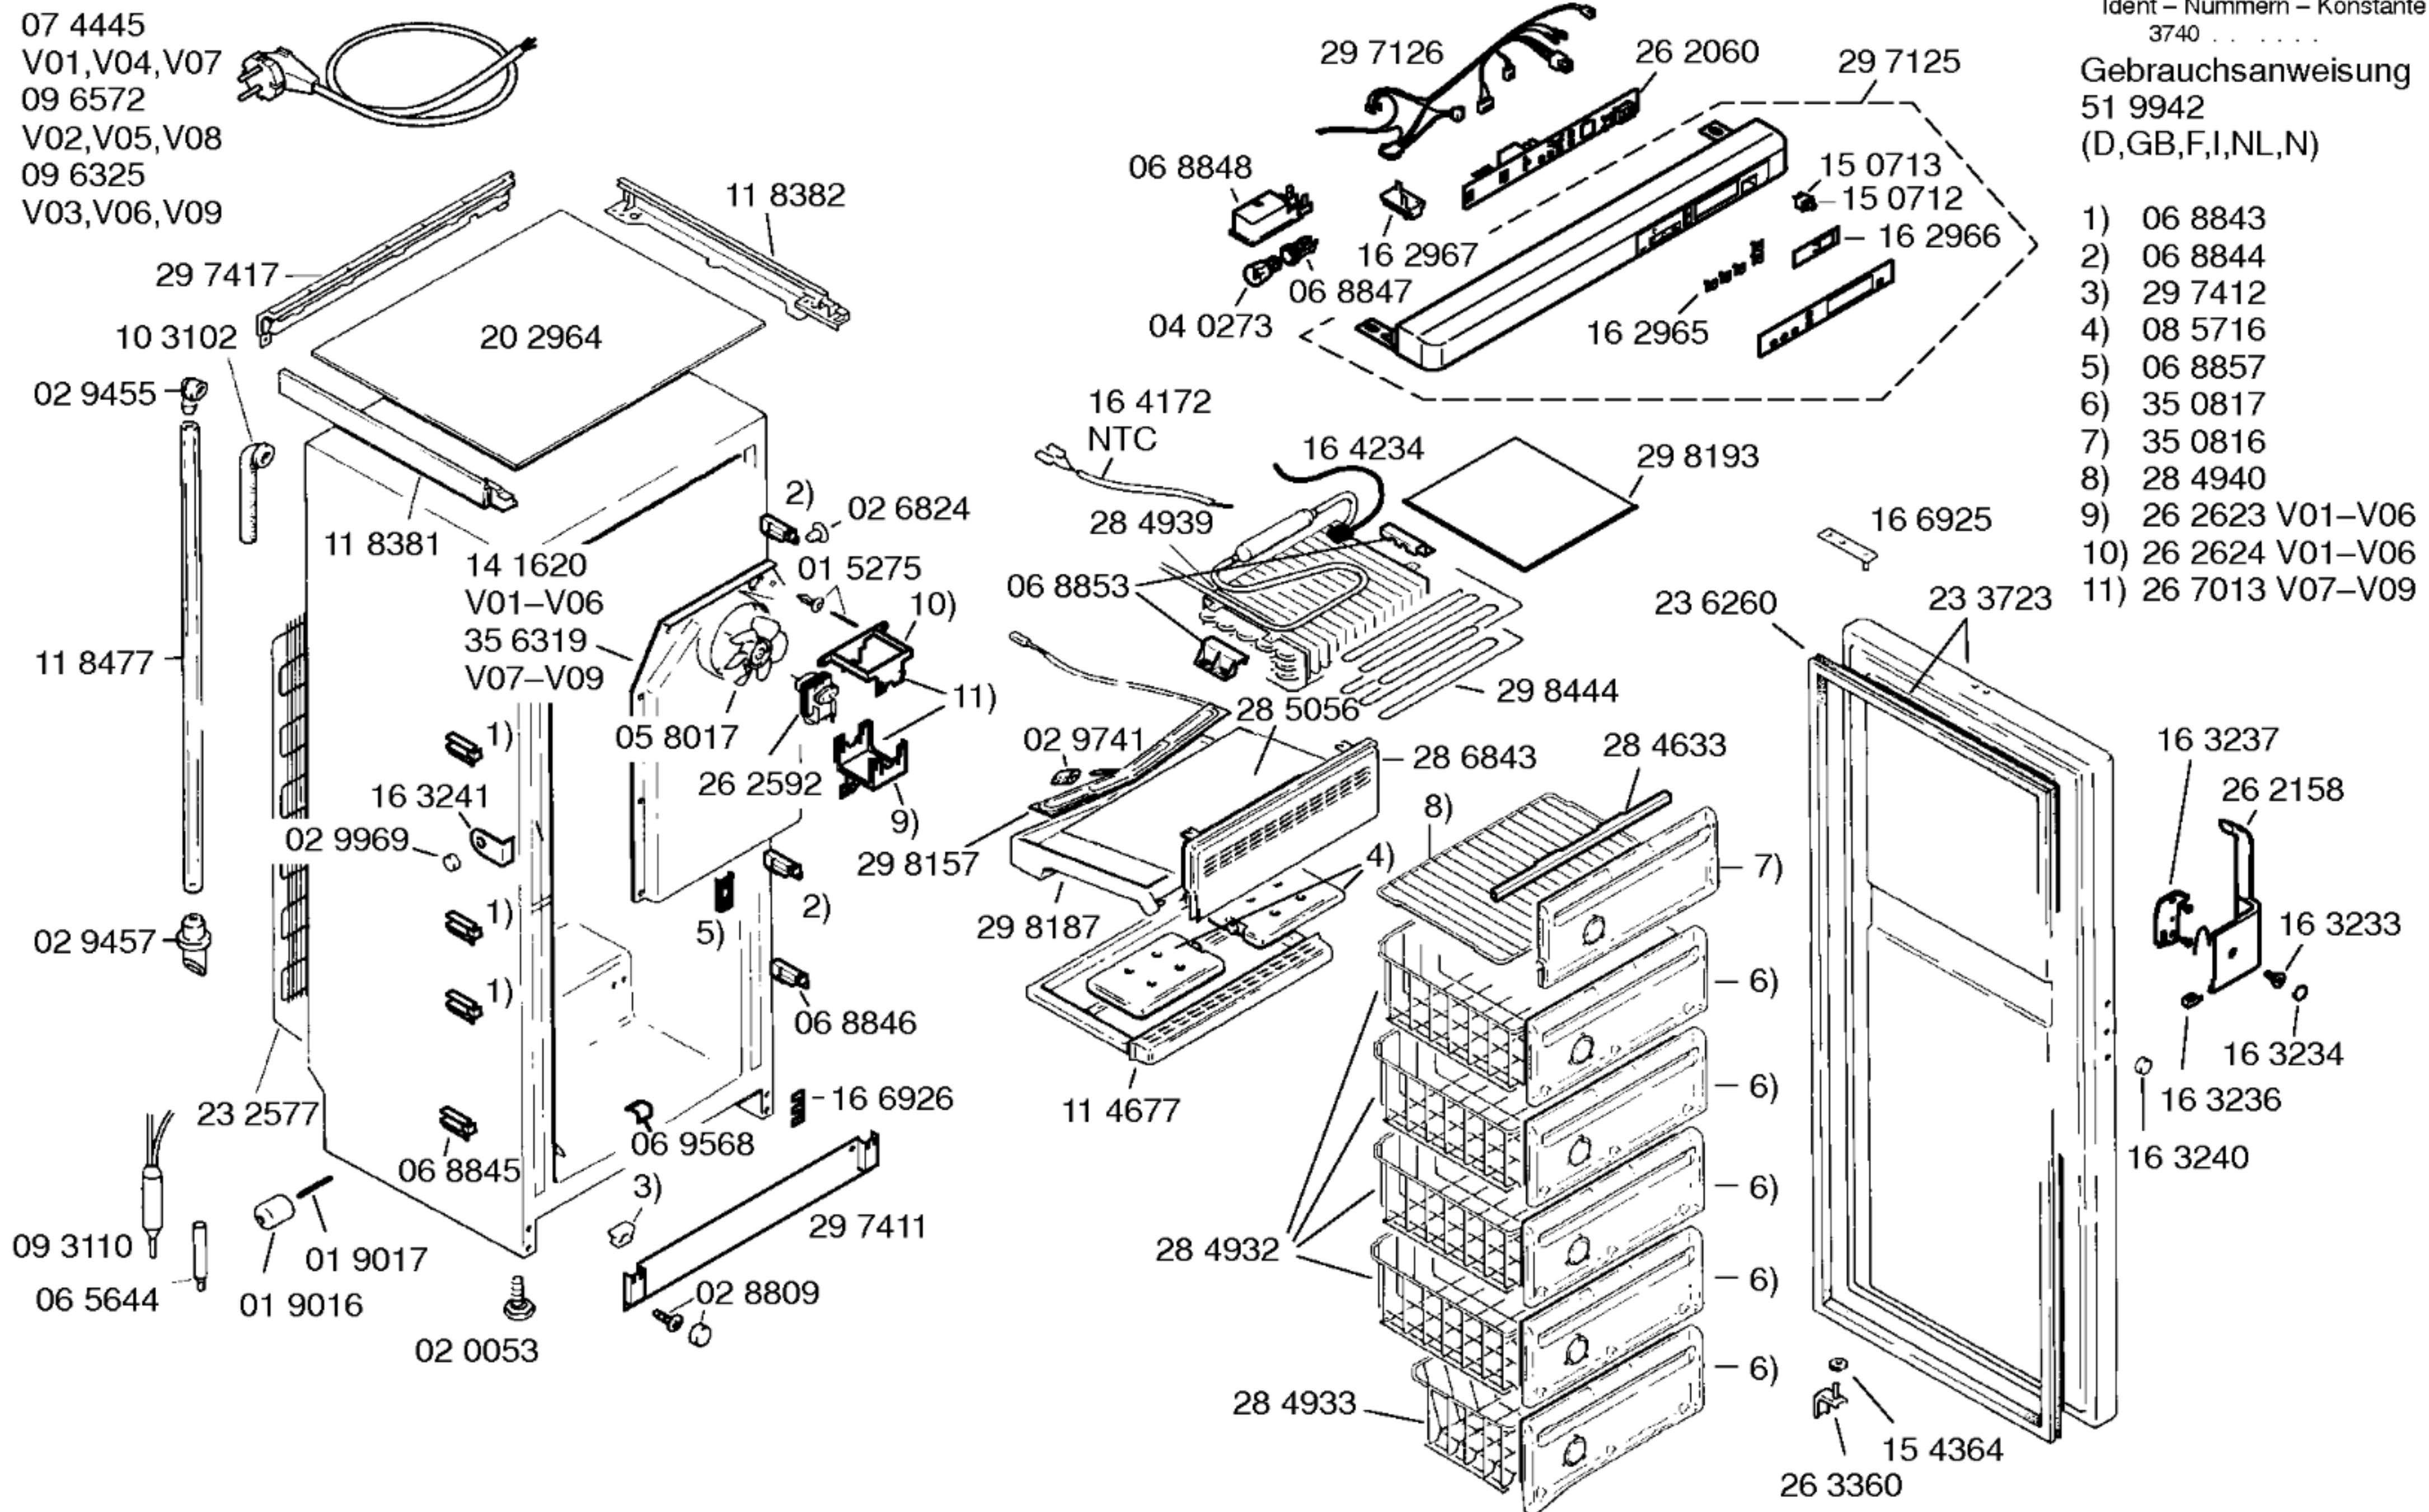

Ident - Nummern - Konstante
3740

Gebrauchsanweisung
51 9942
(D,GB,F,I,NL,N)

- 1) 06 8843
- 2) 06 8844
- 3) 29 7412
- 4) 08 5716
- 5) 06 8857
- 6) 35 0817
- 7) 35 0816
- 8) 28 4940
- 9) 26 2623 V01-V06
- 10) 26 2624 V01-V06
- 11) 26 7013 V07-V09

**BOSCH**


GSU2606/01-V01
GSU2606CH/01-V02
GSU2606GB/01-V03

GSU2606/42-V04
GSU2606CH/42-V05
GSU2606GB/42-V06

GSU2606/43-V07
GSU2606CH/43-V08
GSU2606GB/43-V09

KÜHL-,GEFRIERGERÄTE
Gefrierschränke, Stand

Ident – Nummern – Konstante
3740

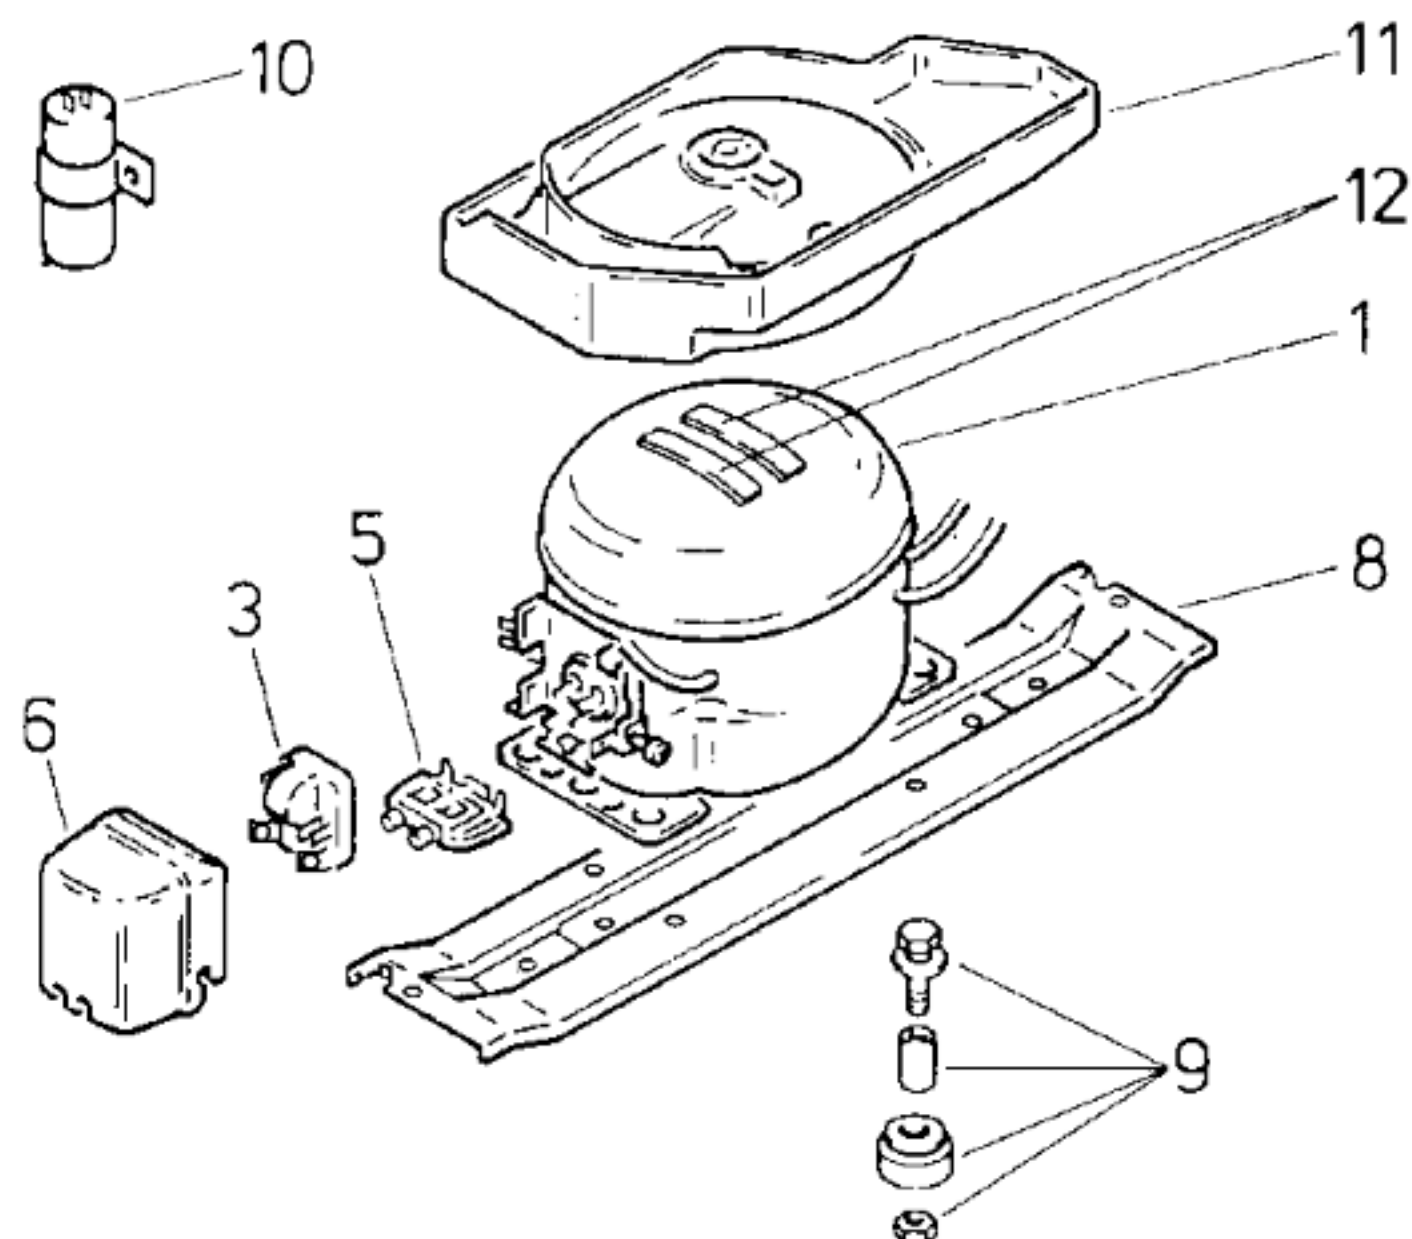

Pos.	V01-V03	V04-V06	
	Danfoss	Danfoss	
	NLY 13 K		
1	14 1684	14 1747	
2			
3	15 1055	15 1055	
4			
5	15 0760	15 0760	
6	15 1072	15 1072	
7			
8	11 1567	11 1567	
9	05 0166	05 0166	
10			
11	09 6212	09 6212	
12	05 6008	05 6008	
13			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Danfoss				
Typ/Type		NLY 13 K				
Förderleistung/Delivery/Débit		l/h	2394			
Anlaufstrom/Starting current/Cour de démarrage		A	11,3			
Widerstand/Resistance/Résistance		Ω	11,0			
Hi/aux		Ω	9,0			
Temp.–Regler/Thermostat		Elektronisch				
Solltemperatur–Einstellung		°C	EIN AUS			
		–18	–15 –16			
		–22	–19 –20			
		–26	–23 –24			
"alarm"			–9 –14			
Füllmenge/Fill.quantity/Charge		R600	siehe Typenschild			
Anschlußwert/Conn.load/Puiss. connectée		W	120			
Heizung/Heater/Chaufage		Abtauheizung		Rinnenheizung		
Widerstand/Resistance/Résistance		Ω	173	6050 ± 730Ω		
Leistung/Power/Puissance		W	333	9,5		
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		Ω	340			
Widerstand NTC–Fühler		°C	kΩ	°C	kΩ	°C
		–1	17,3	–15	36,5	–20
		–9	26,2	–16	38,8	–23
		–14	34,5	–19	45,9	–24
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		Ω				
Spannung/Voltage/Tension		V				