







07 4445

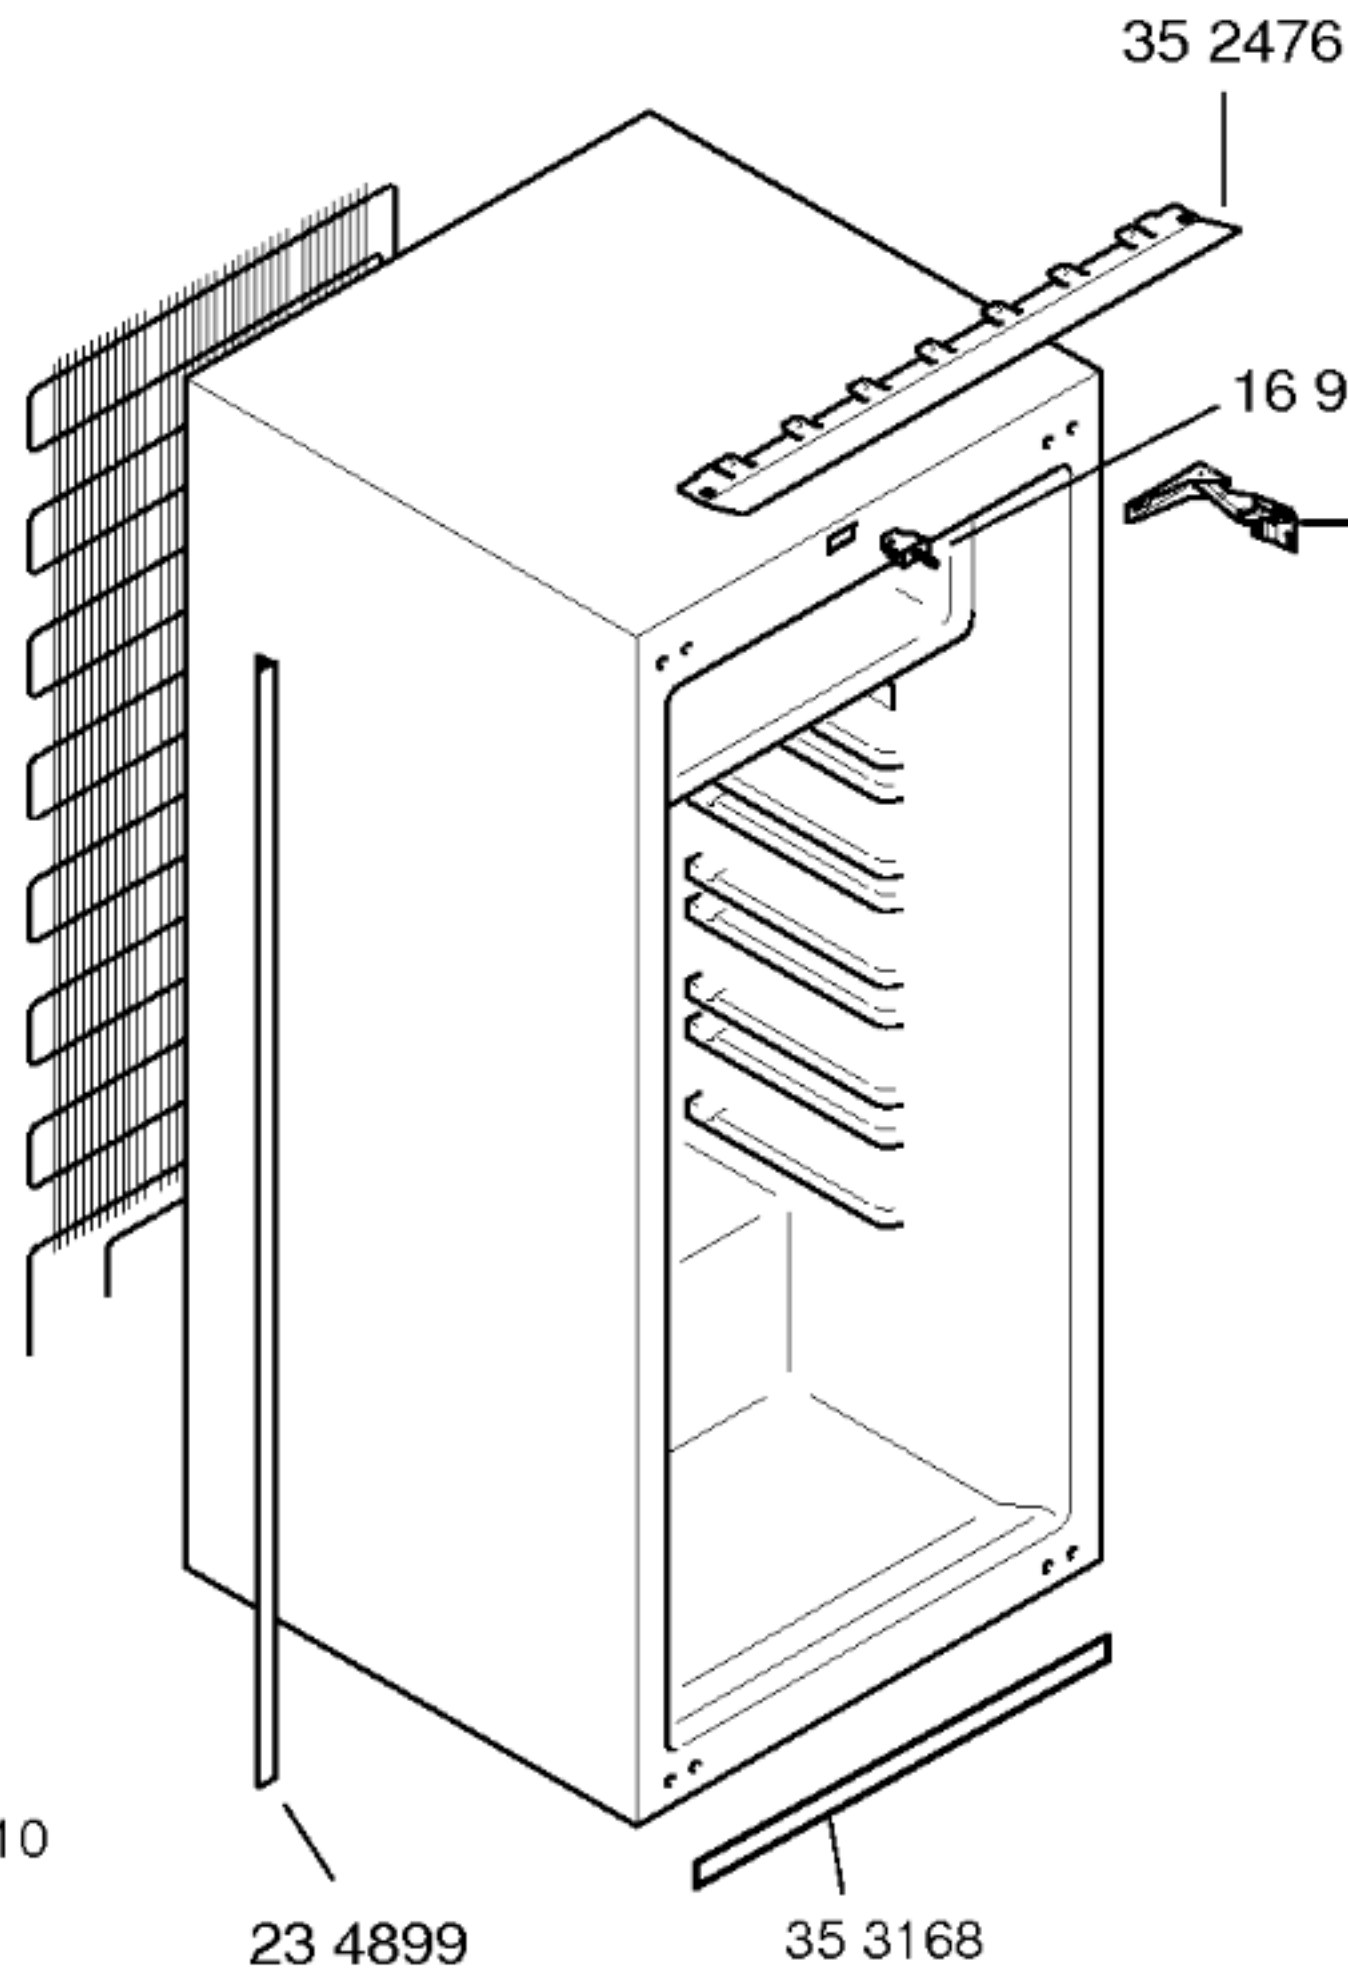

35 2476
16 9300


48 1572
Set

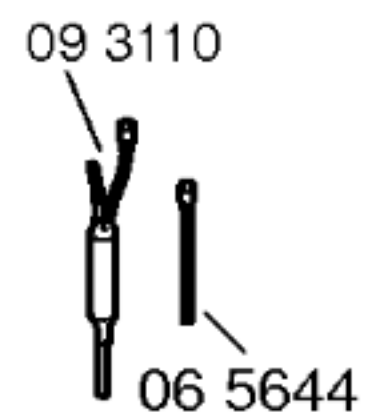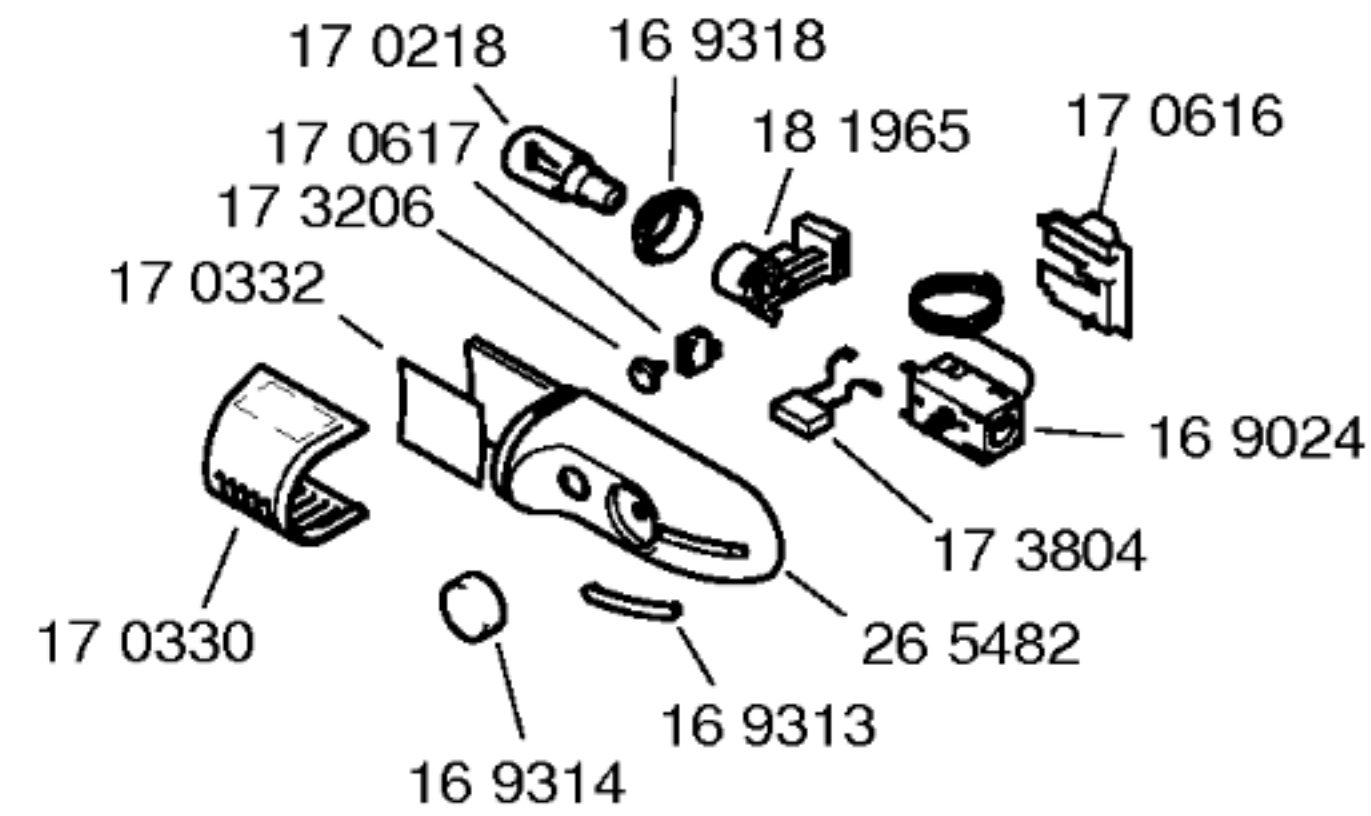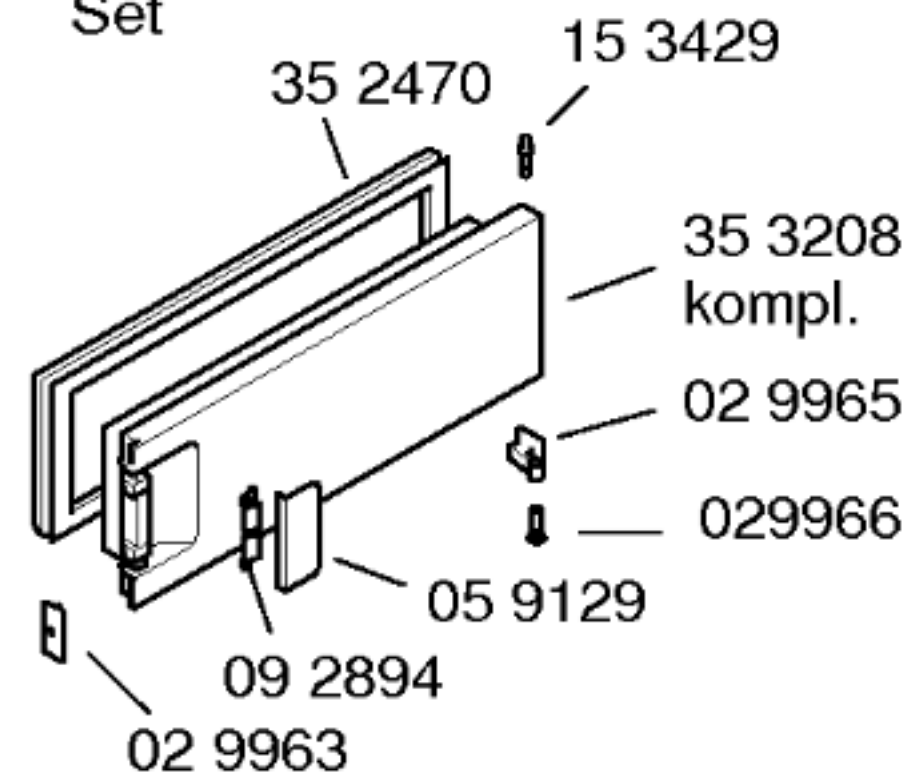

Gebrauchsanweisung
58 1967
(de,en,fr,it,nl,da,no,fi
sv)
58 1968
(it,es,pt,el)

Montageanleitung
52 3227
(de,en,fr,ti,nl,da,no,
fi,sv,tr)

Beistellsatz
26 6056

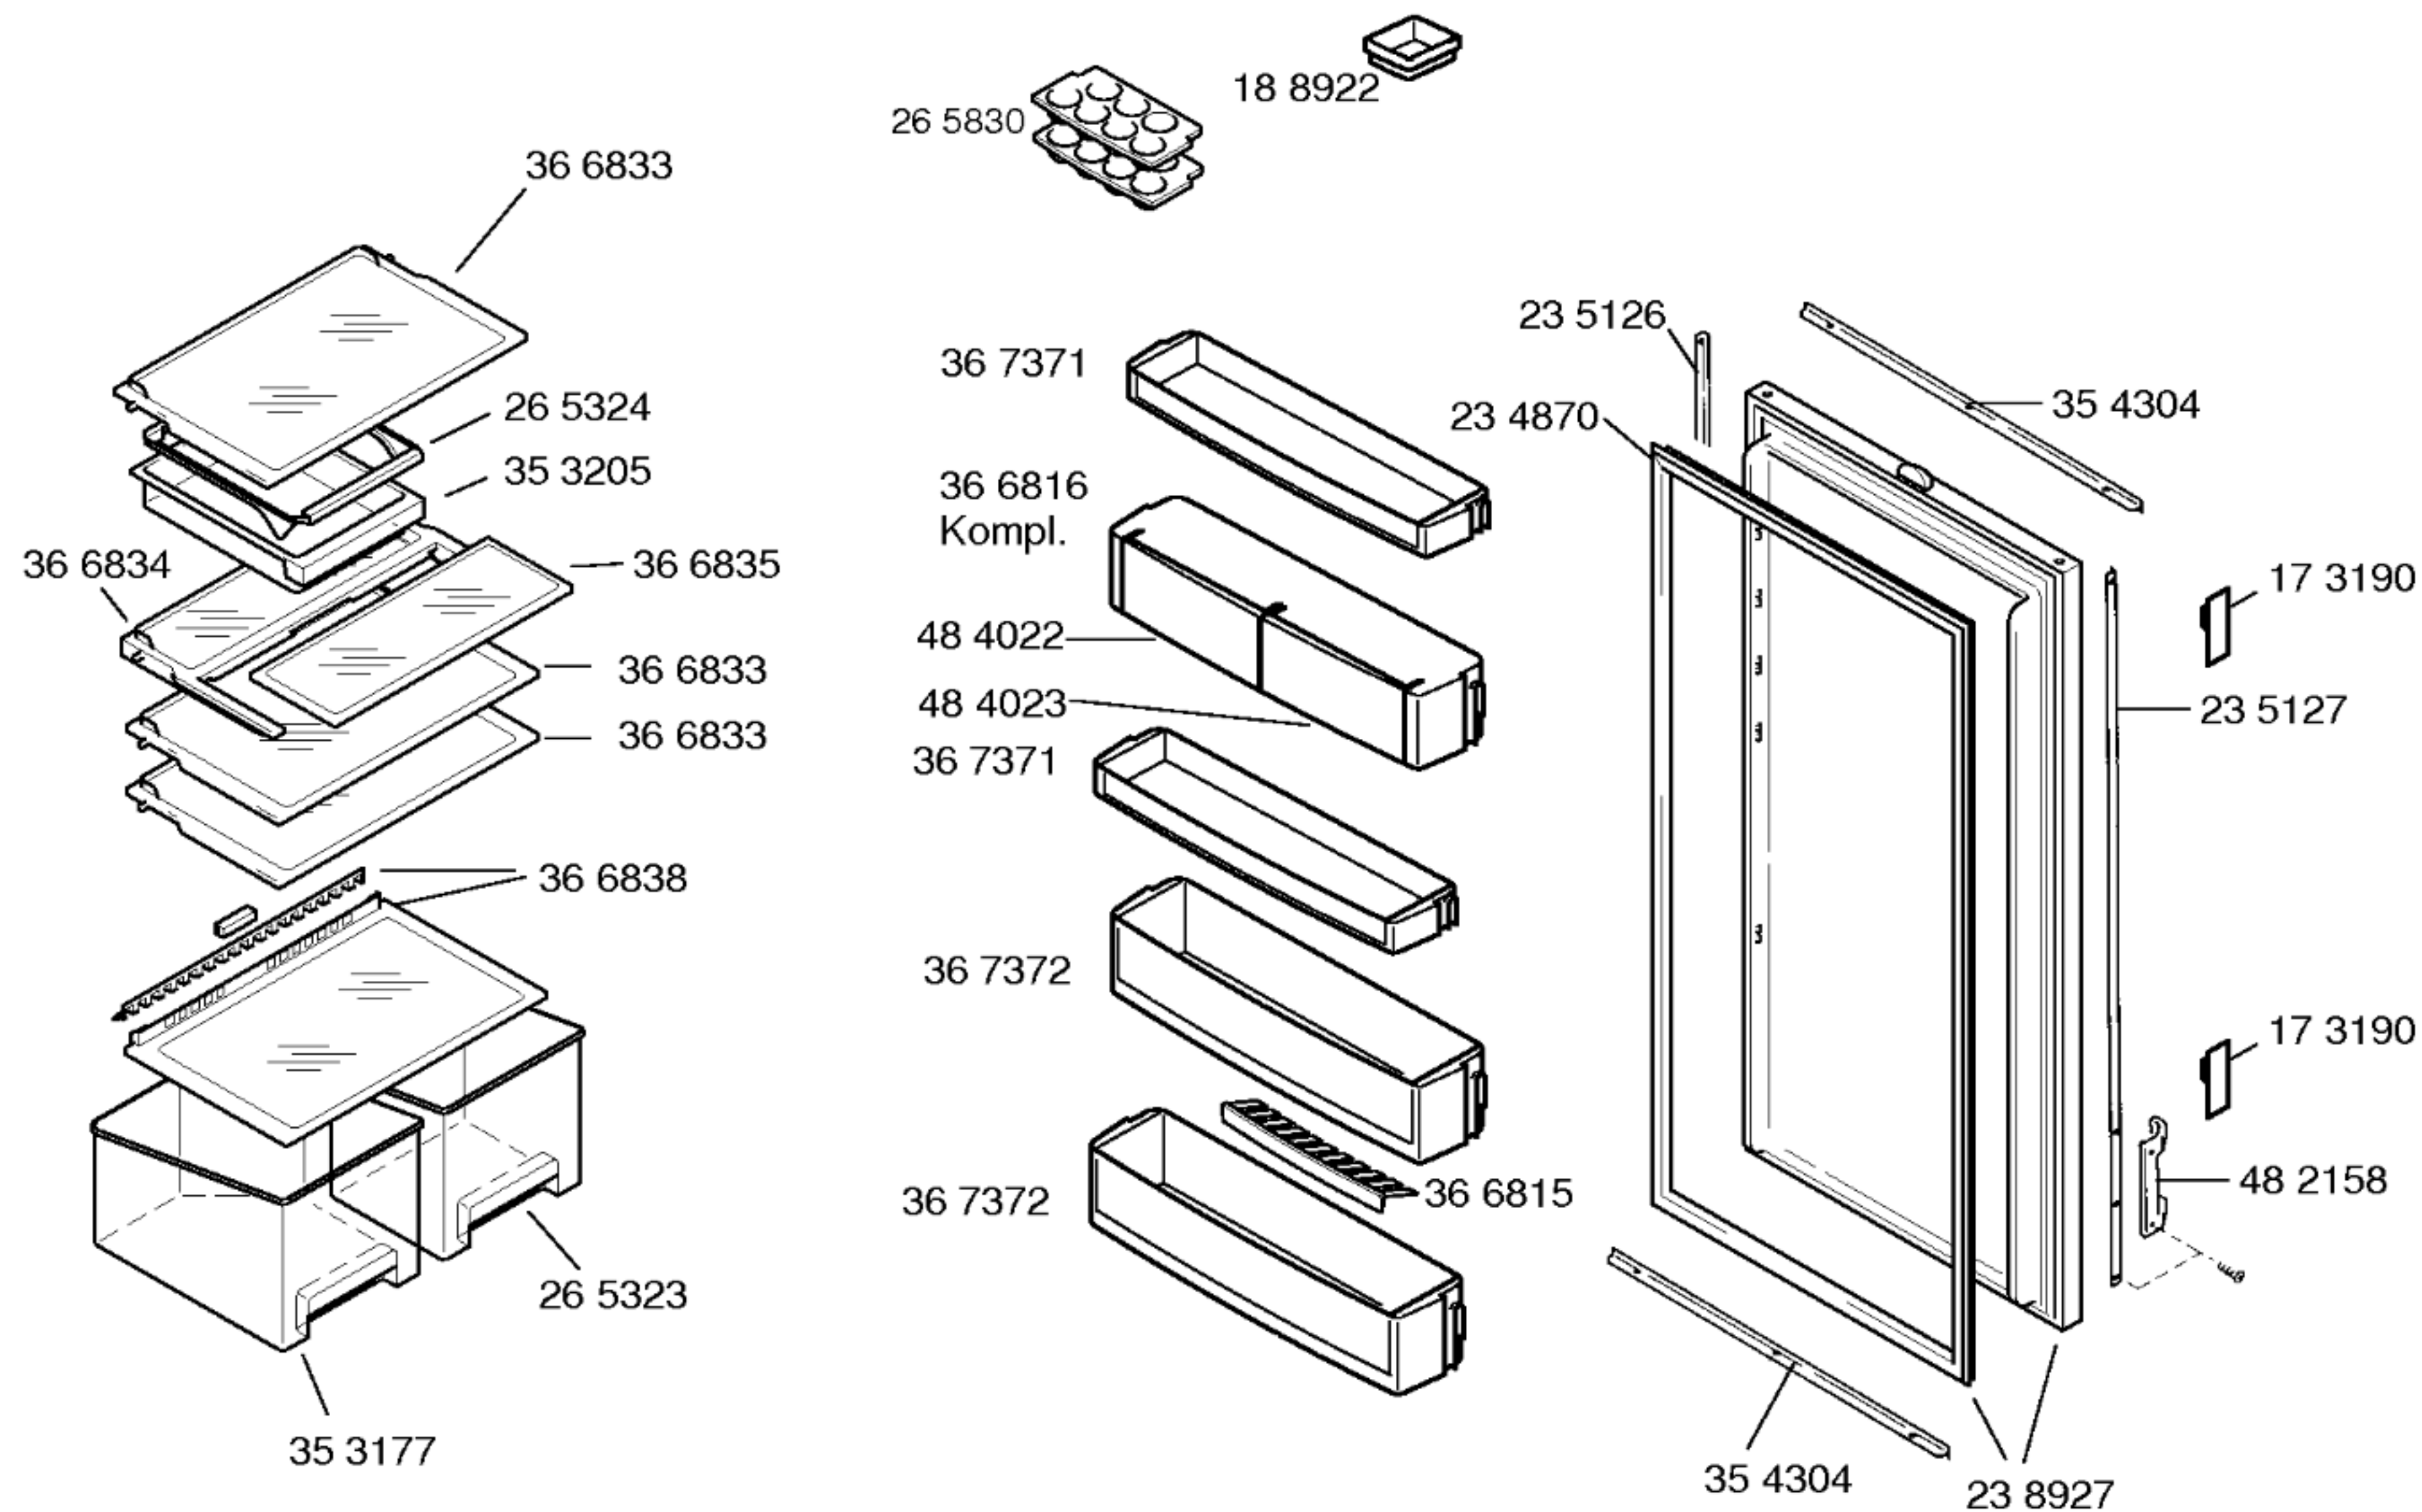

Ausgleichsblenden braun

KSZ1288	37mm
KSZ1289	41mm
KSZ1280	57mm
ALU	
KSZ1281	37mm
KSZ1282	41mm
KSZ1283	57mm


Dekorrahmen braun

KZ12480	1225mm
---------	--------

Türverkleidung

Edelstahl	1225mm
KZ11232 Griff re.	
KZ11233 Griff li.	

Torx-Schraube 3,5x16
für Dekorrahmen
17 3166

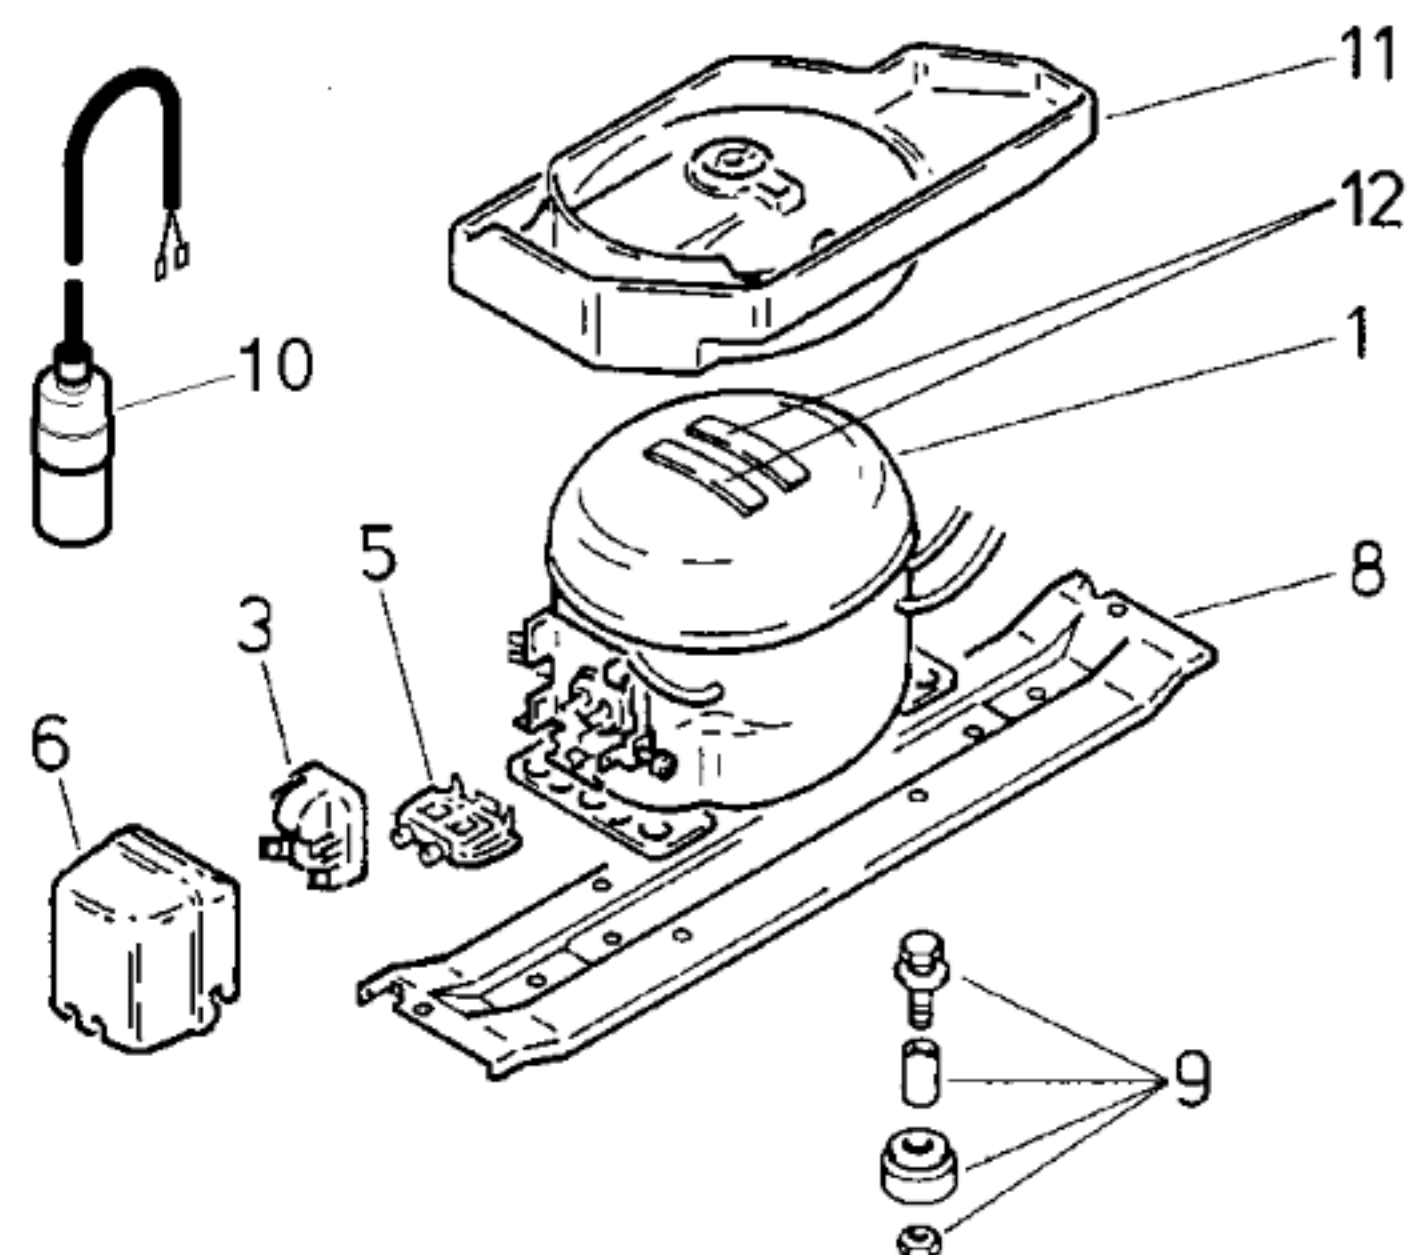

Pos.	V01	V02	
	Matsushita	Danfoss	
	ESS 60E	TLY 7KK2	
1	14 2158	14 2059	
2			
3	18 3589	15 1055	
4			
5	18 3590	15 0760	
6	18 3591	15 1072	
7	16 9319	16 9319	
8	27 1375	26 4879	
9	05 0166	0 50166	
10			
11	35 4549	36 5099	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Danfoss	
Typ/Type		ESS 60E	TLY7KK2	
Förderleistung/Delivery/Débit		l/h	1076	1168
Anlaufstrom/Starting current/Cour de démarrage		A	5,6	5,7
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	30,6	27,1
		Hi/aux Ω	26,7	27,2
Temp.-Regler/Thermostat		Ranco		
Typ/Type				
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		+4,0 +4,0		
Valeurs de commutation		-32,0 -12,0		
		(„abtauen“ od.) „alarm“		
Füllmenge/Fill.quantity/Charge		R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée		W	63	71
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild