



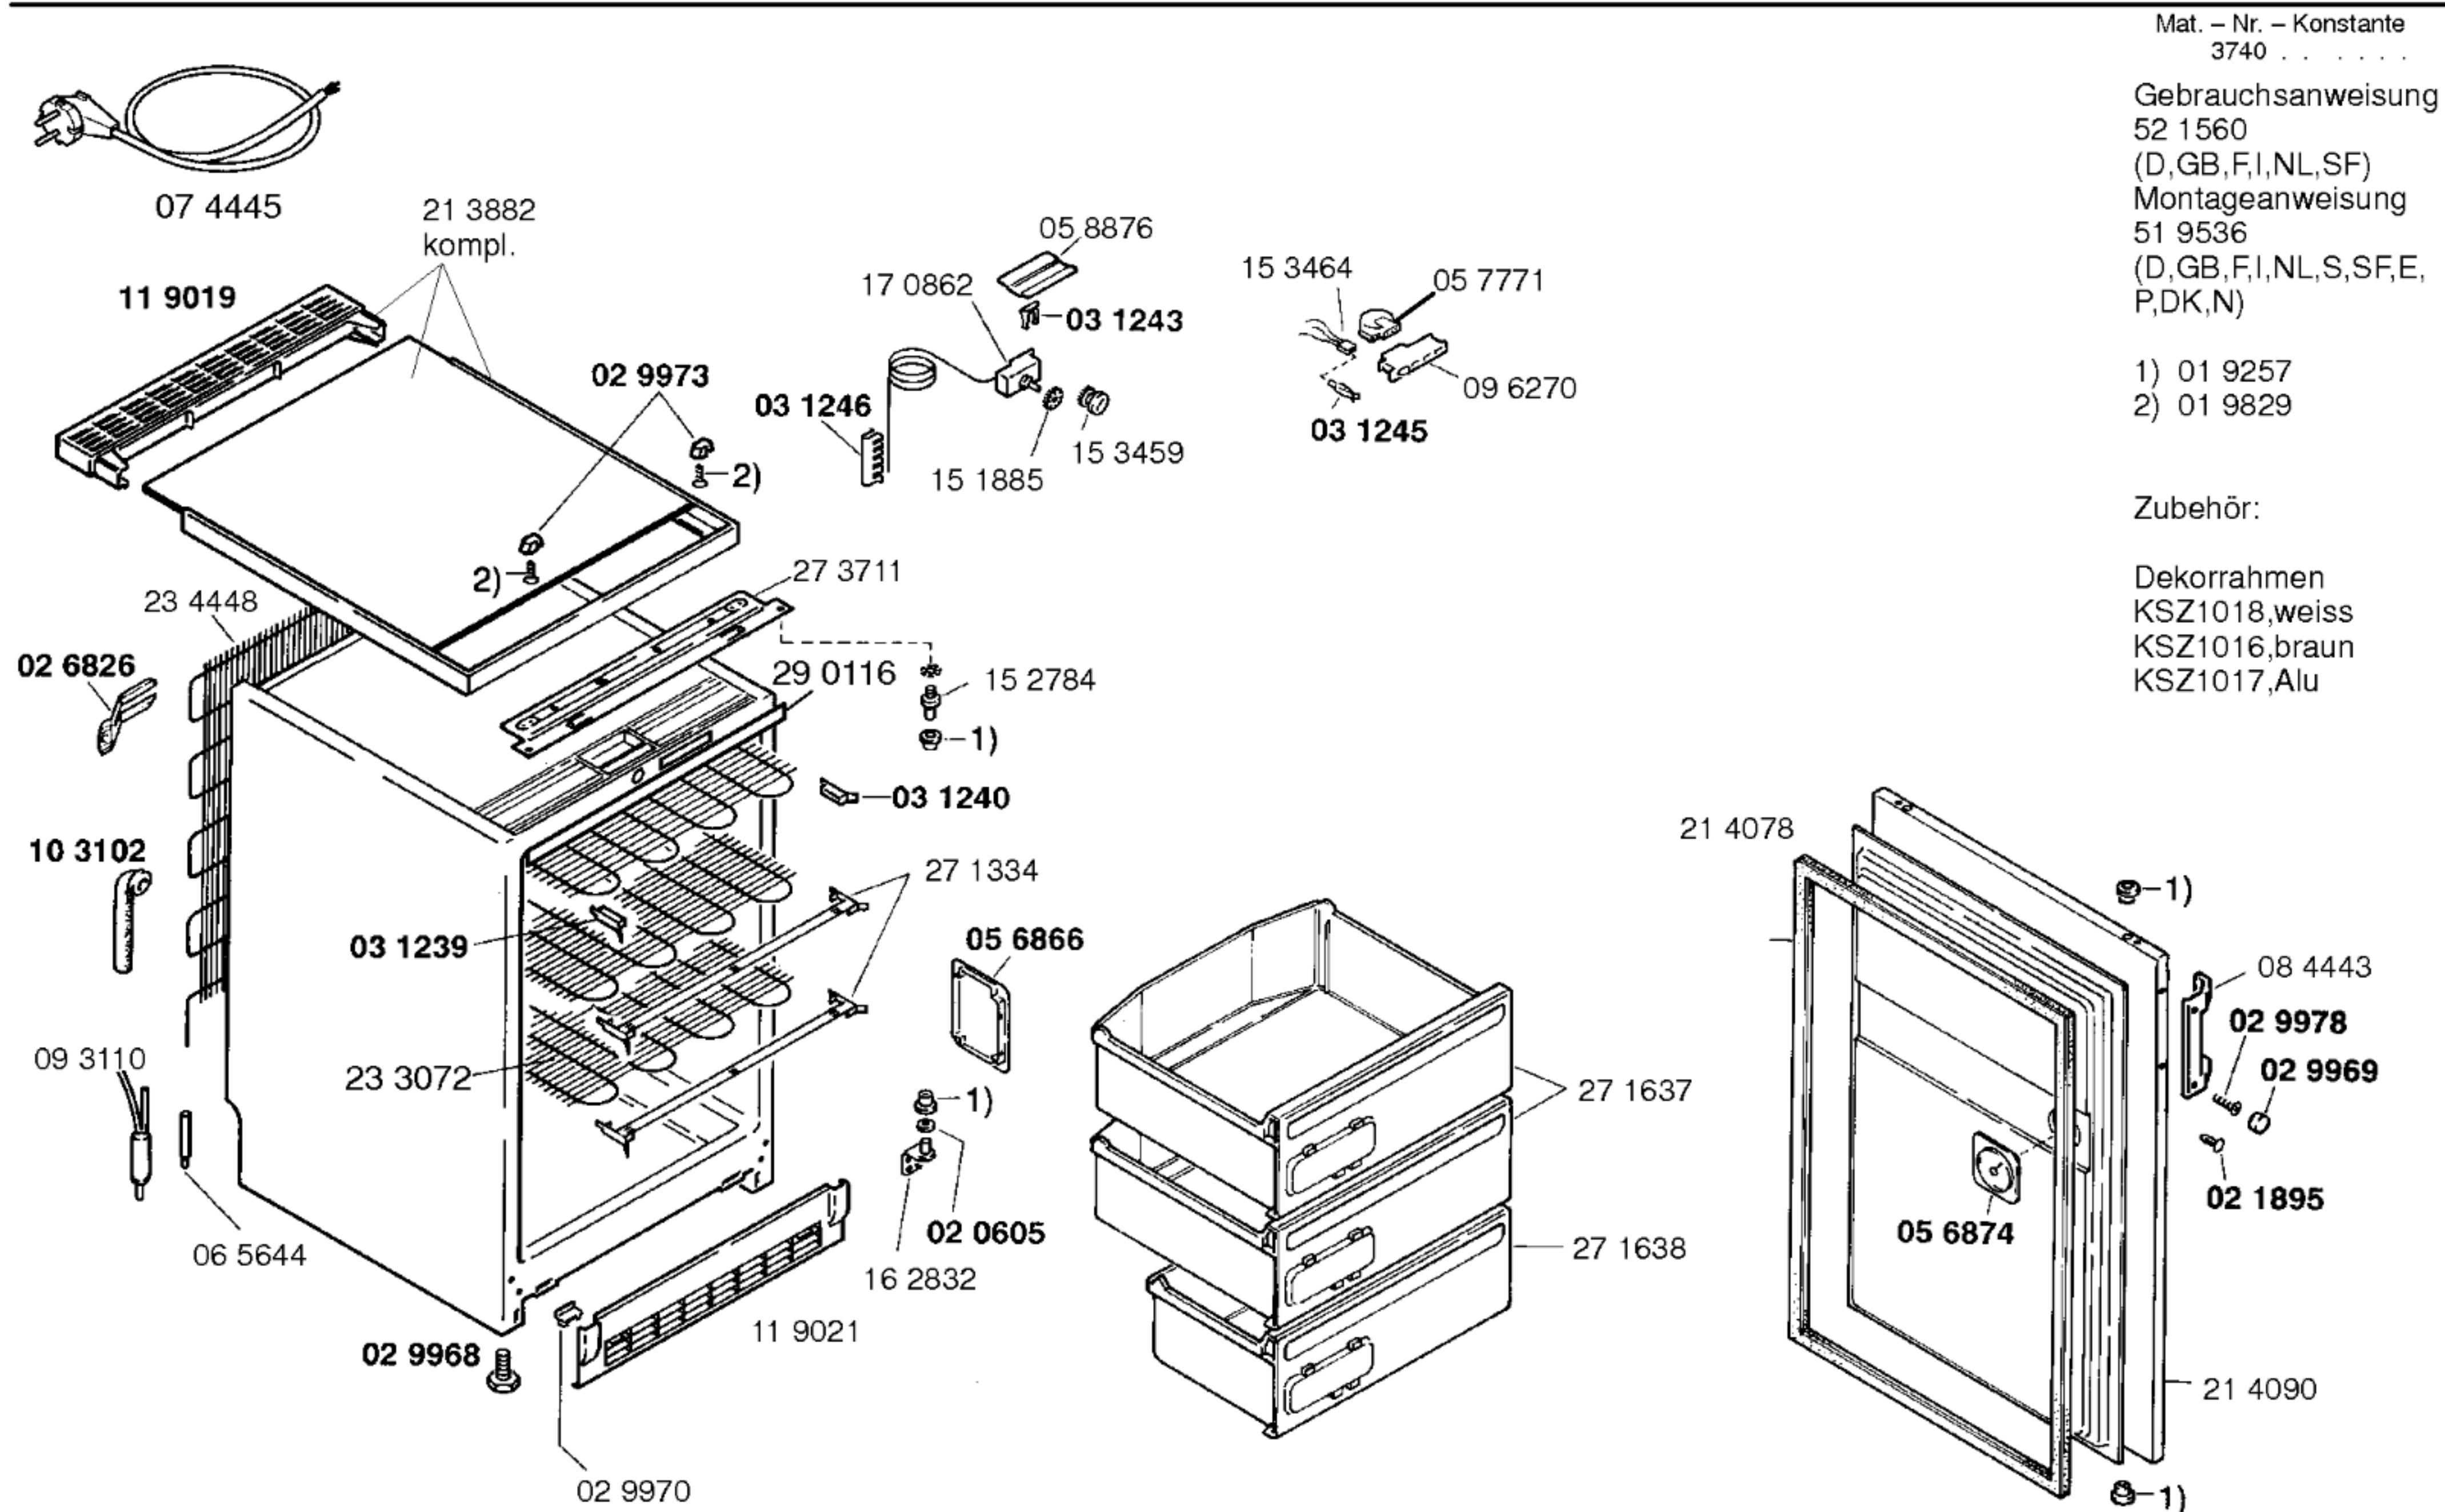

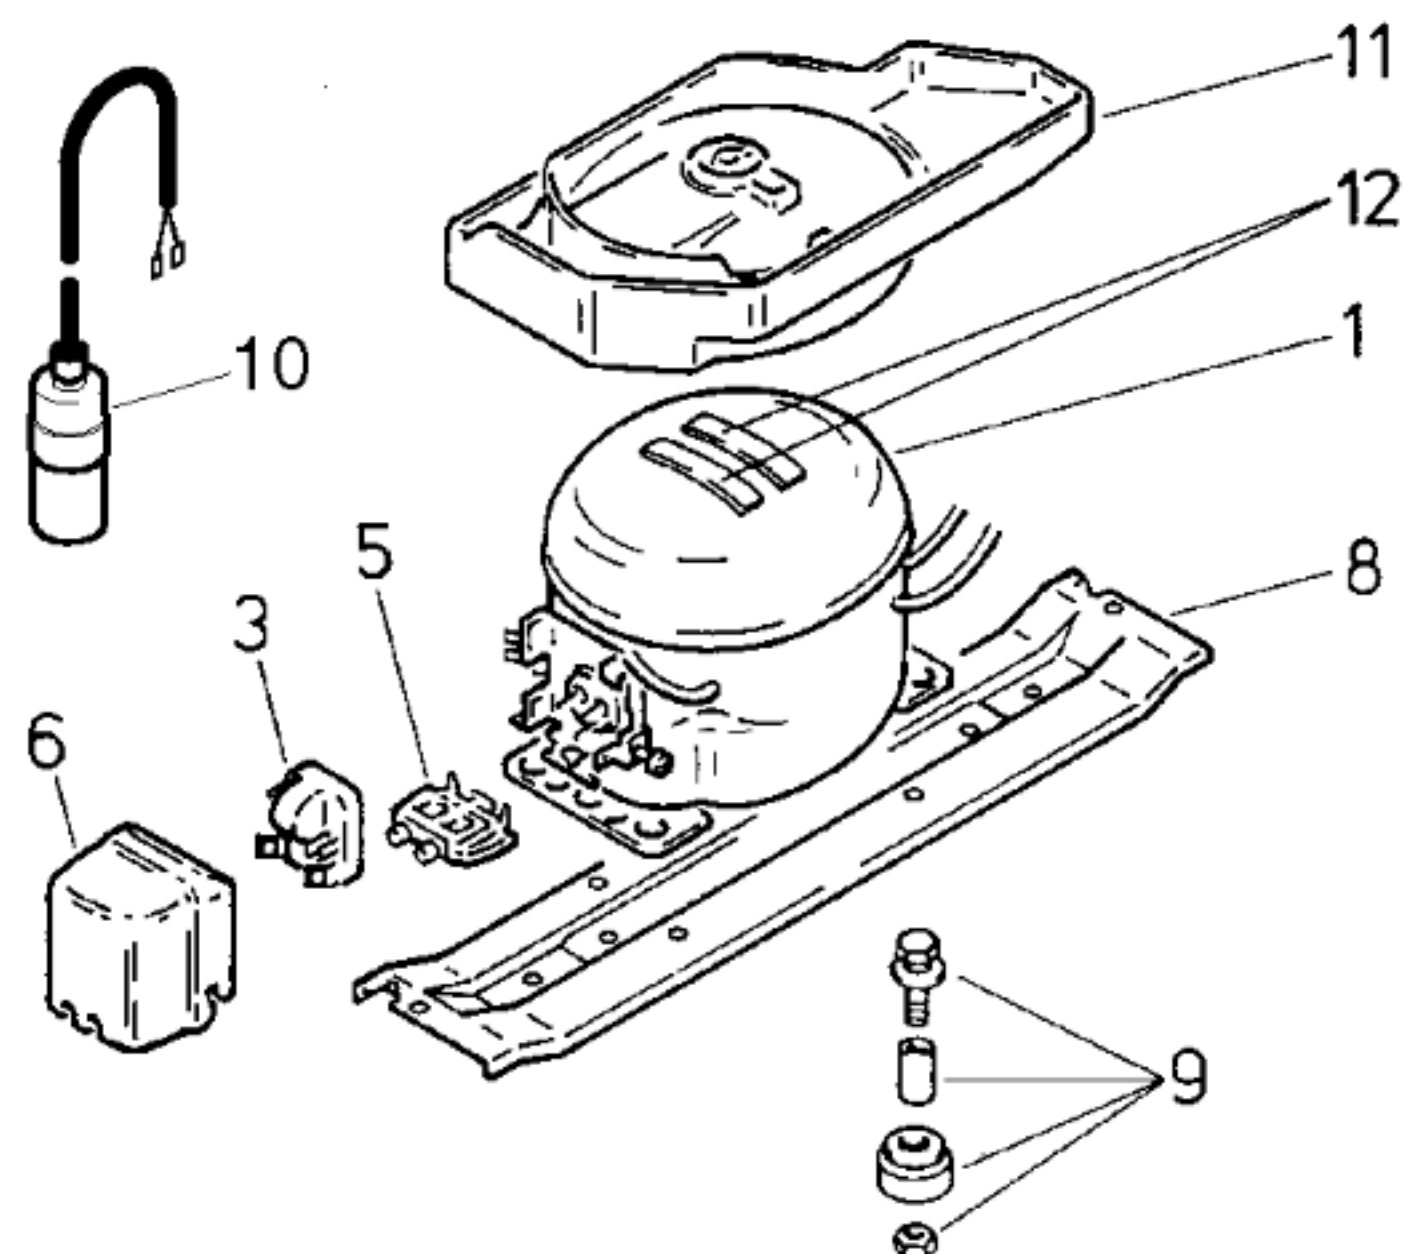

	V02	V01	
Pos.	Matsushita	Danfoss	
	SD 65 E	TLES7K	
1	14 1316	14 1585	
2			
3	15 3306	15 1055	
4			
5	15 3865	15 0760	
6	15 3303	15 1072	
7			
8	27 0833	27 0833	
9			
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Danfoss	
Typ/Type		SD 65 E	TLES 7 K	
Förderleistung/Delivery/Débit		l/h	1168	
Anlaufstrom/Starting current/Cour de démarrage		A	4,5	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	16,5	
		Hi/aux Ω	16,9	
Temp.-Regler/Thermostat		Danfoss	WHF	
Typ/Type		BE 002	TF 57 SF2	
Reglerstellung/Position		kalt warm	kalt warm	
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	–25 –17	–25 –17
Valeurs de commutation		„aus“	–33 –23	–33 –23
		(„abtauen“ od.) „alarm“	–19,5 –13	–19,5 –13
Füllmenge/Fill.quantity/Charge		R600a g	*	*
Anschlußwert/Conn.load/Puiss. connectée		W	78	79
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild