




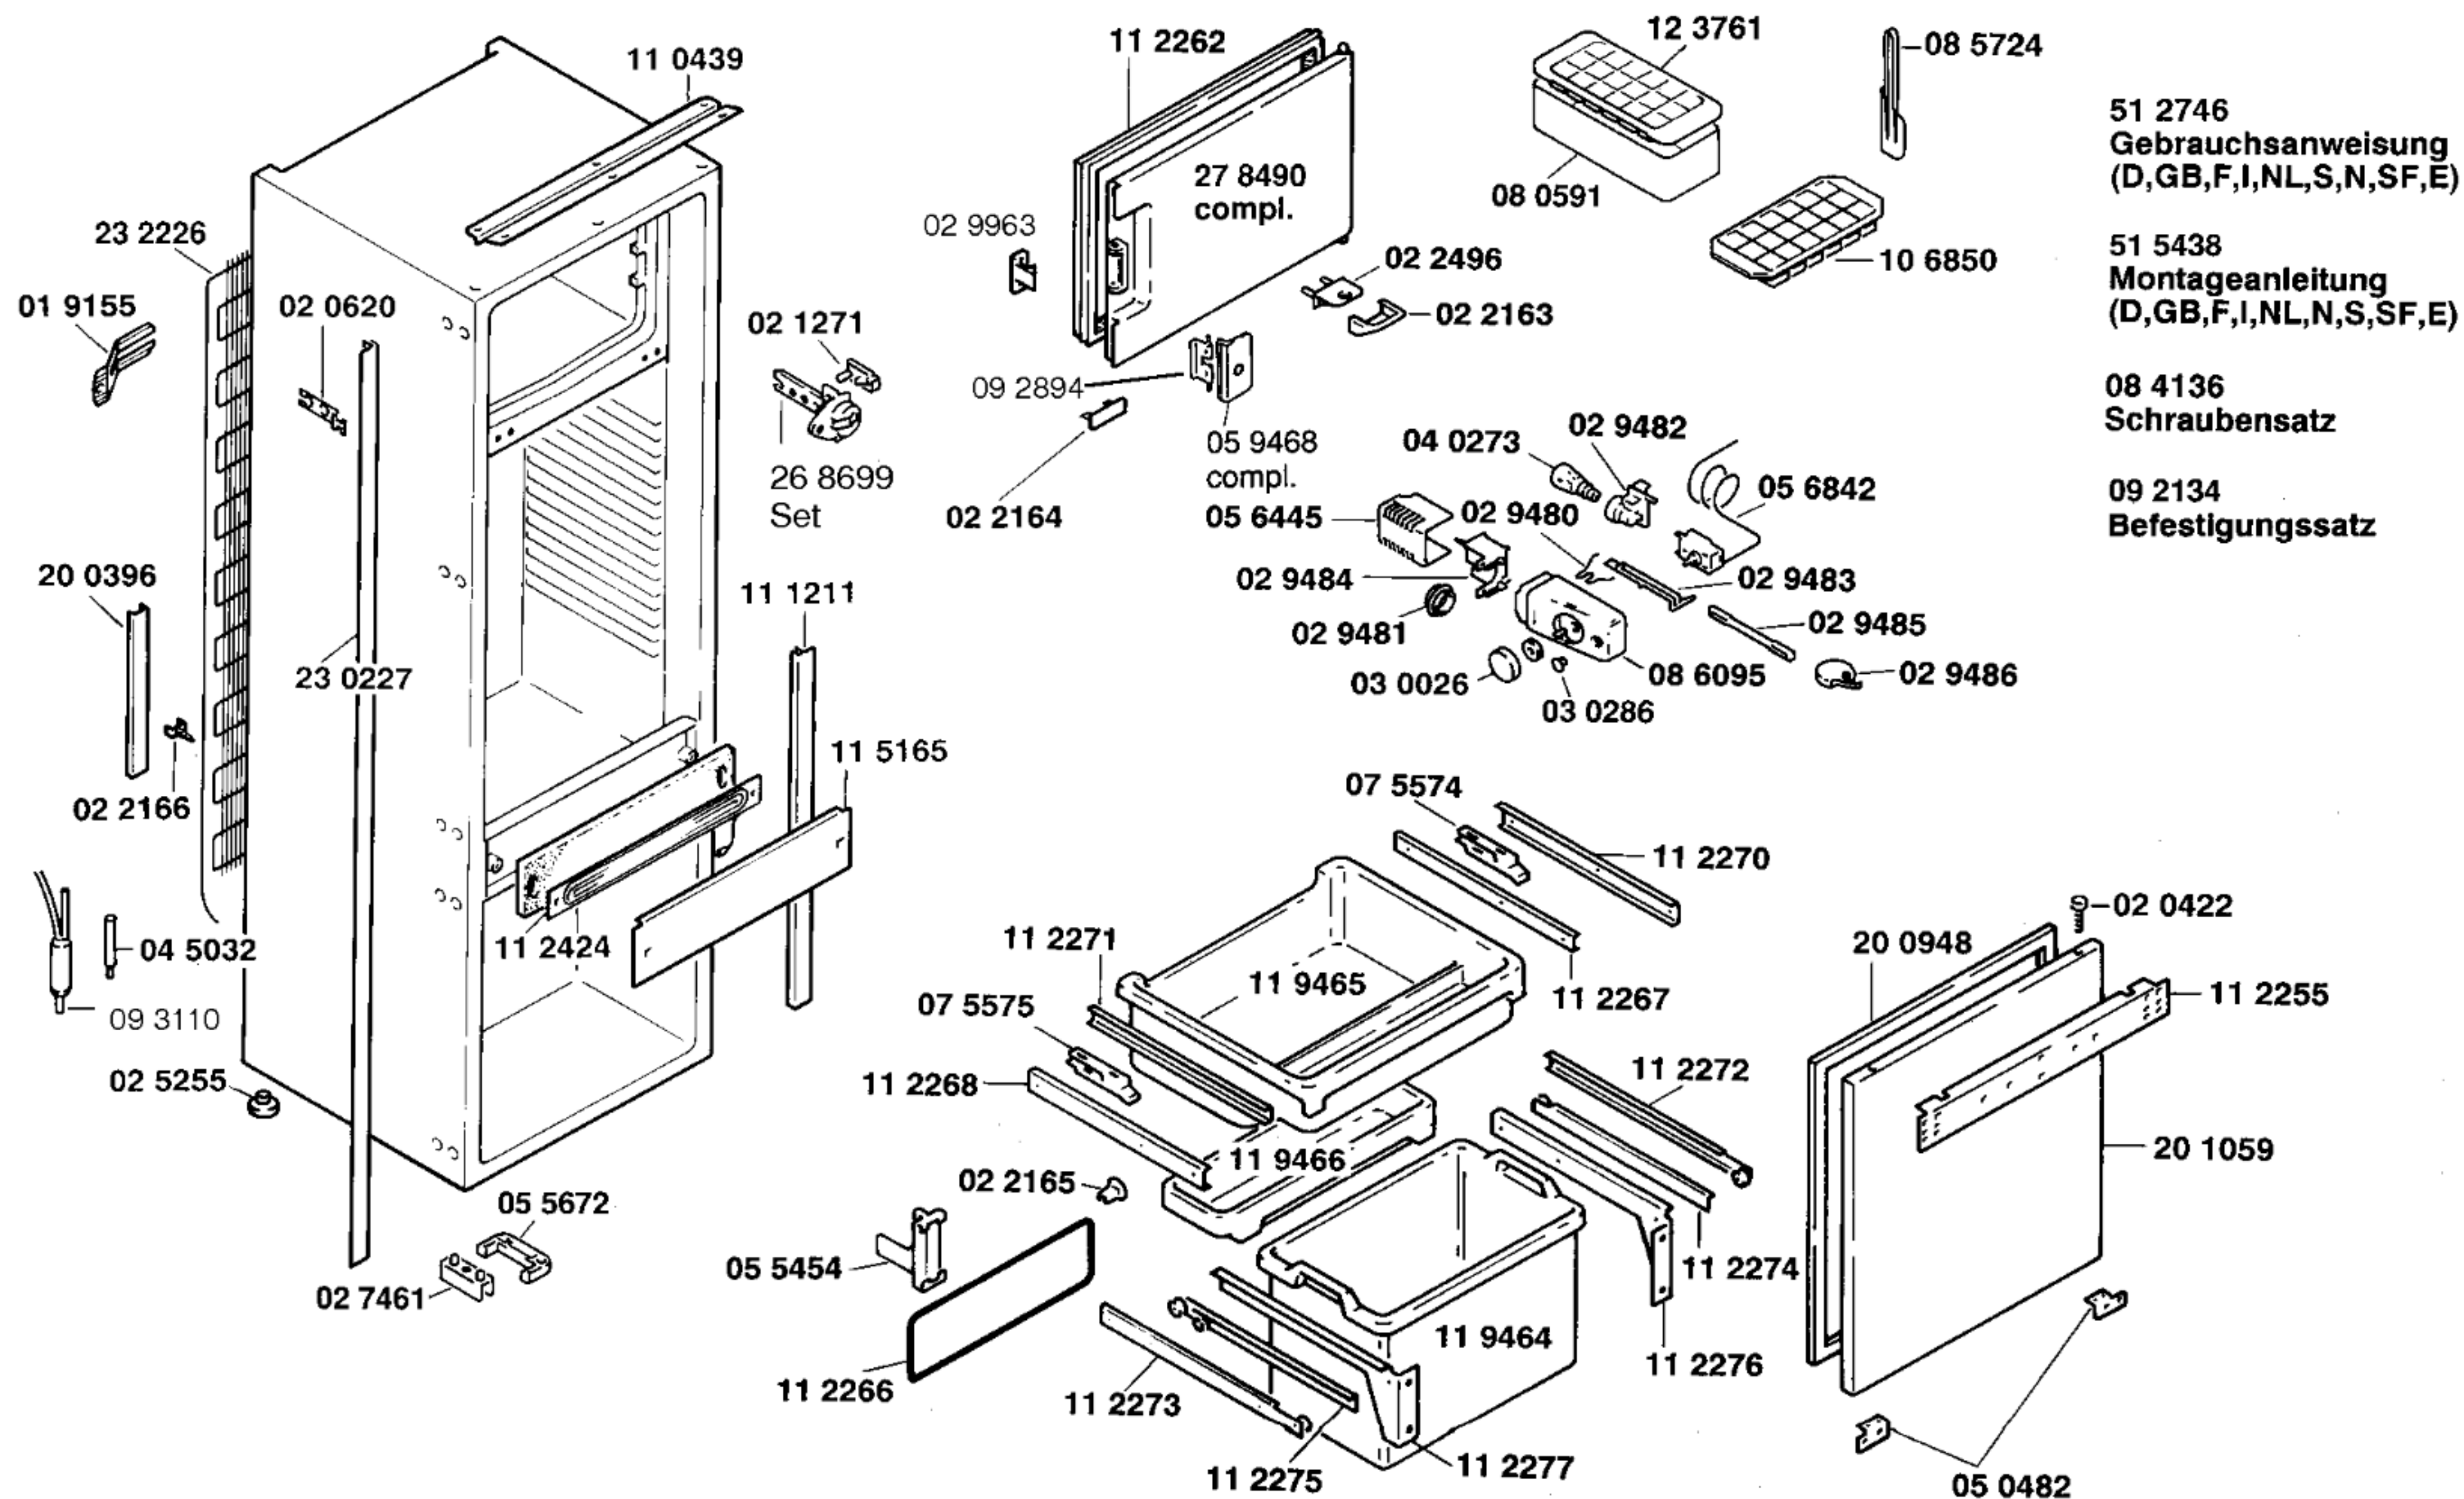

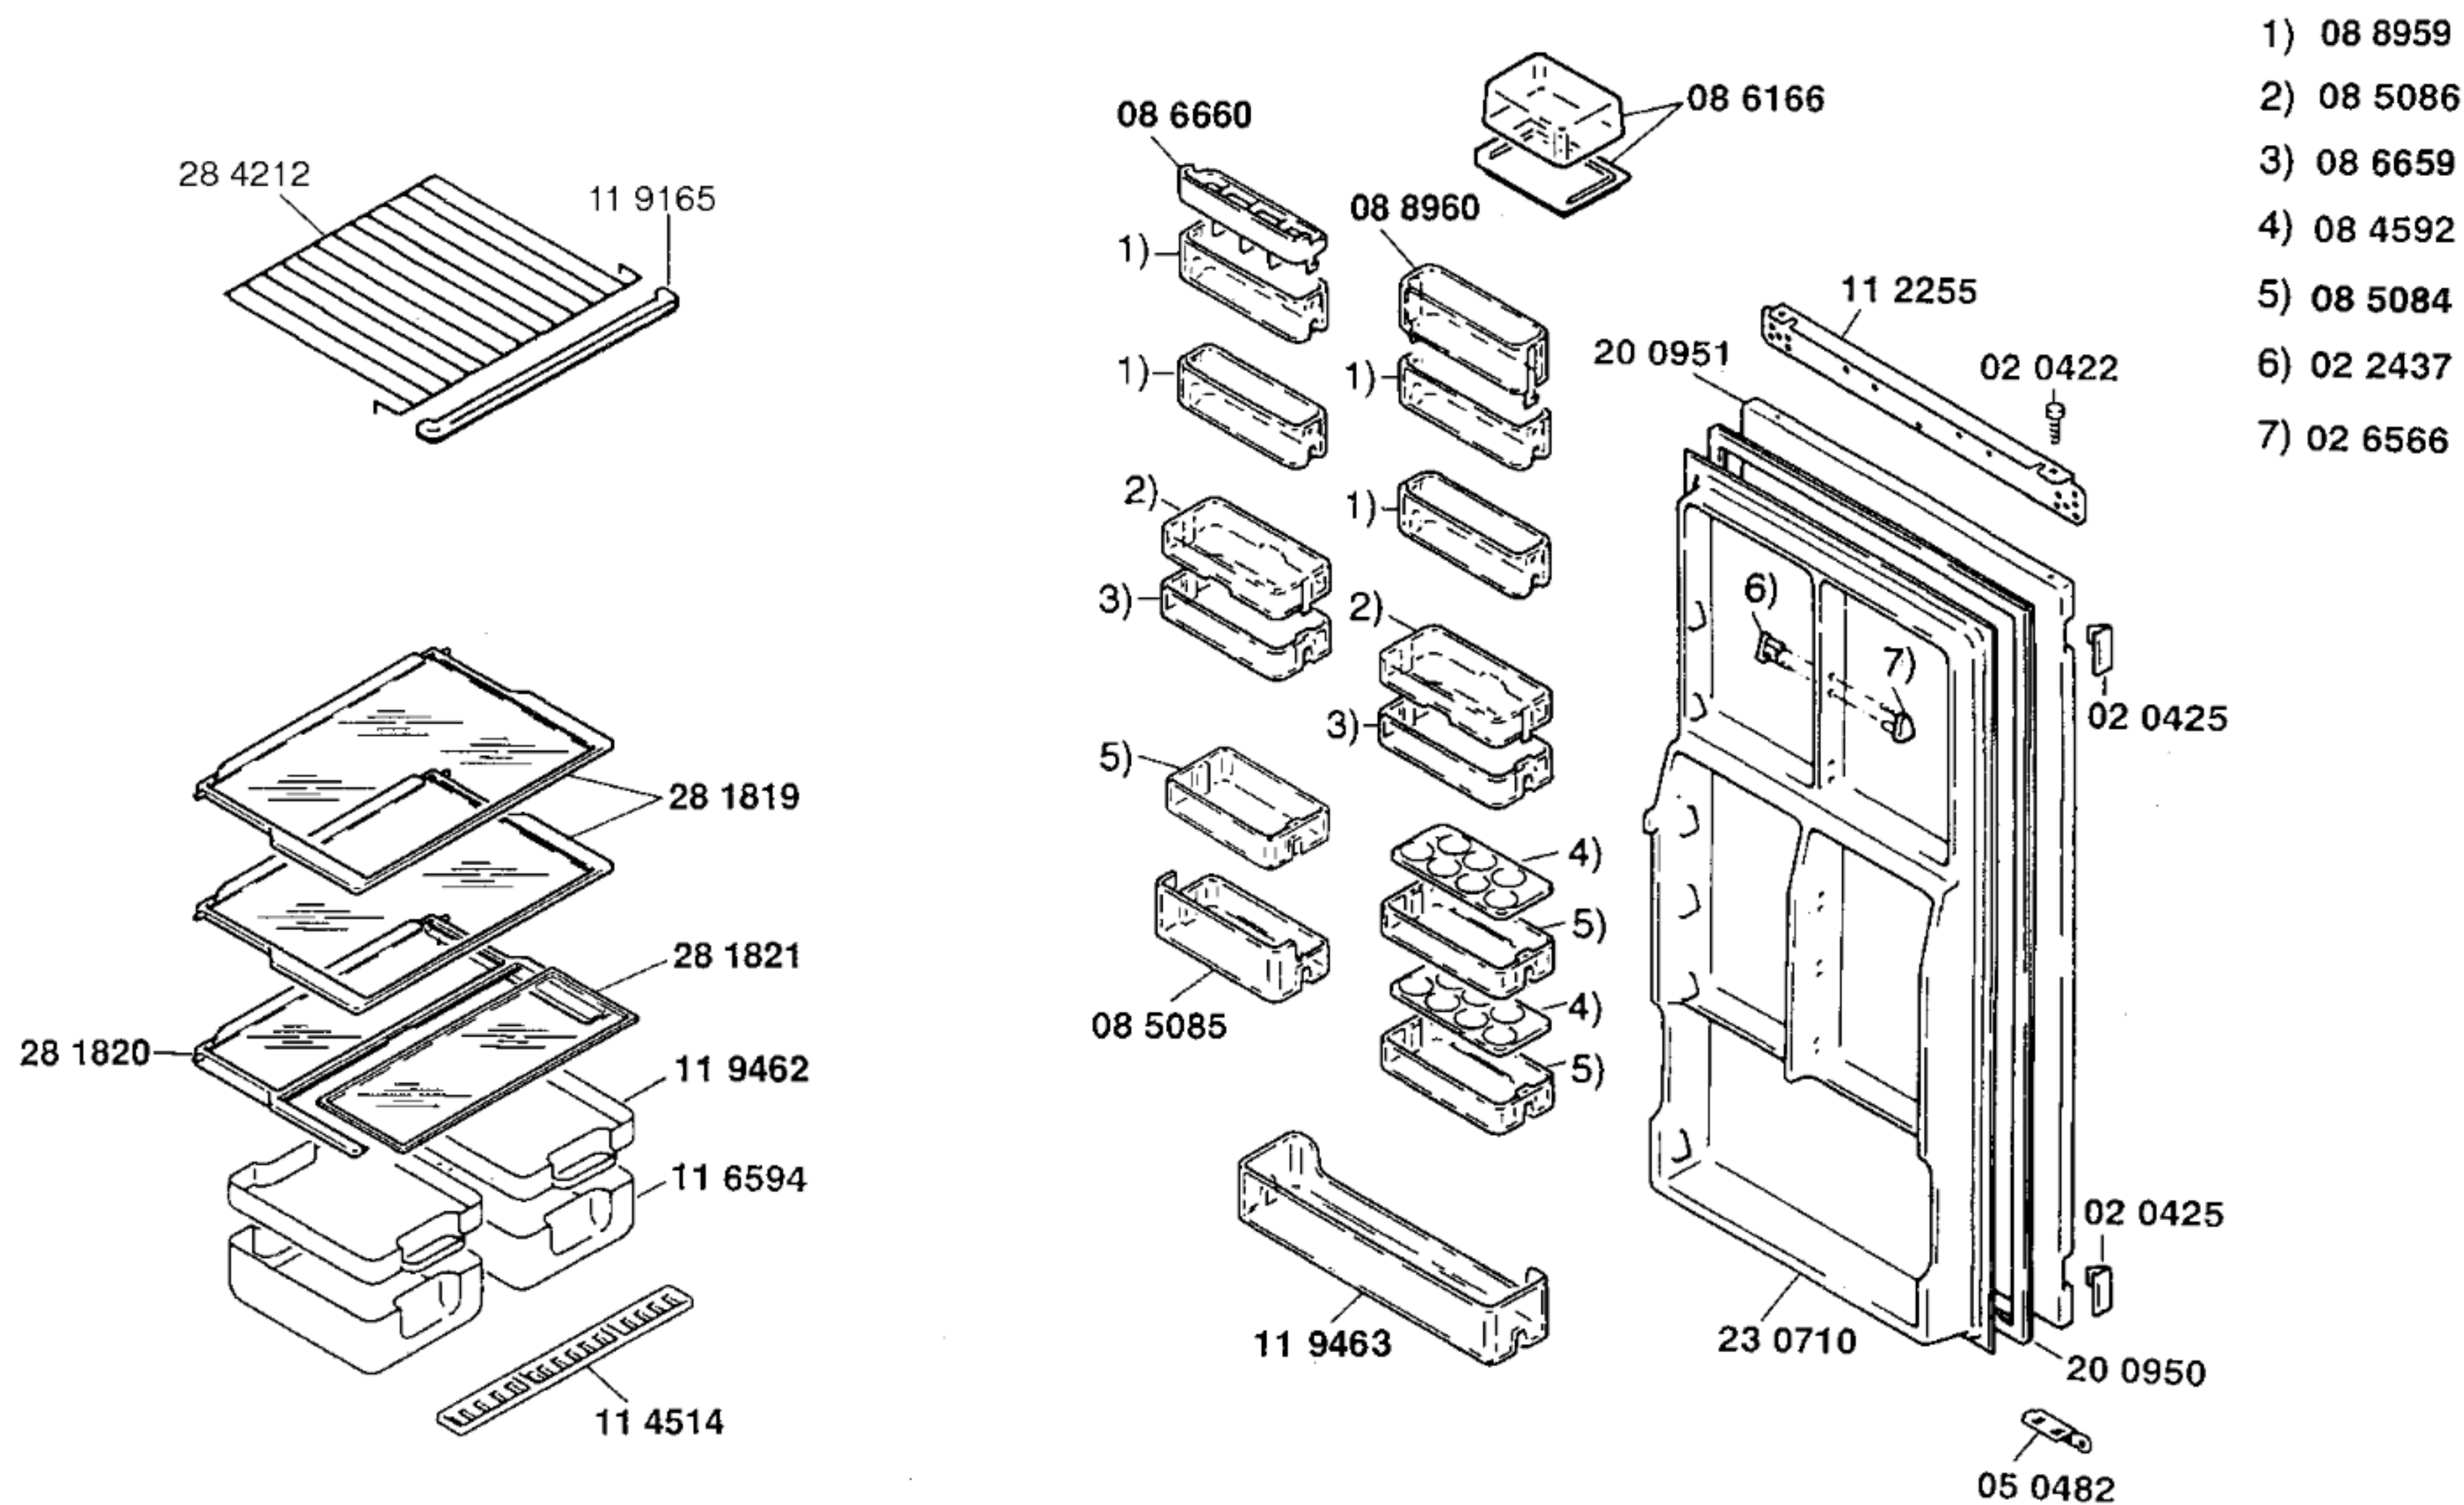

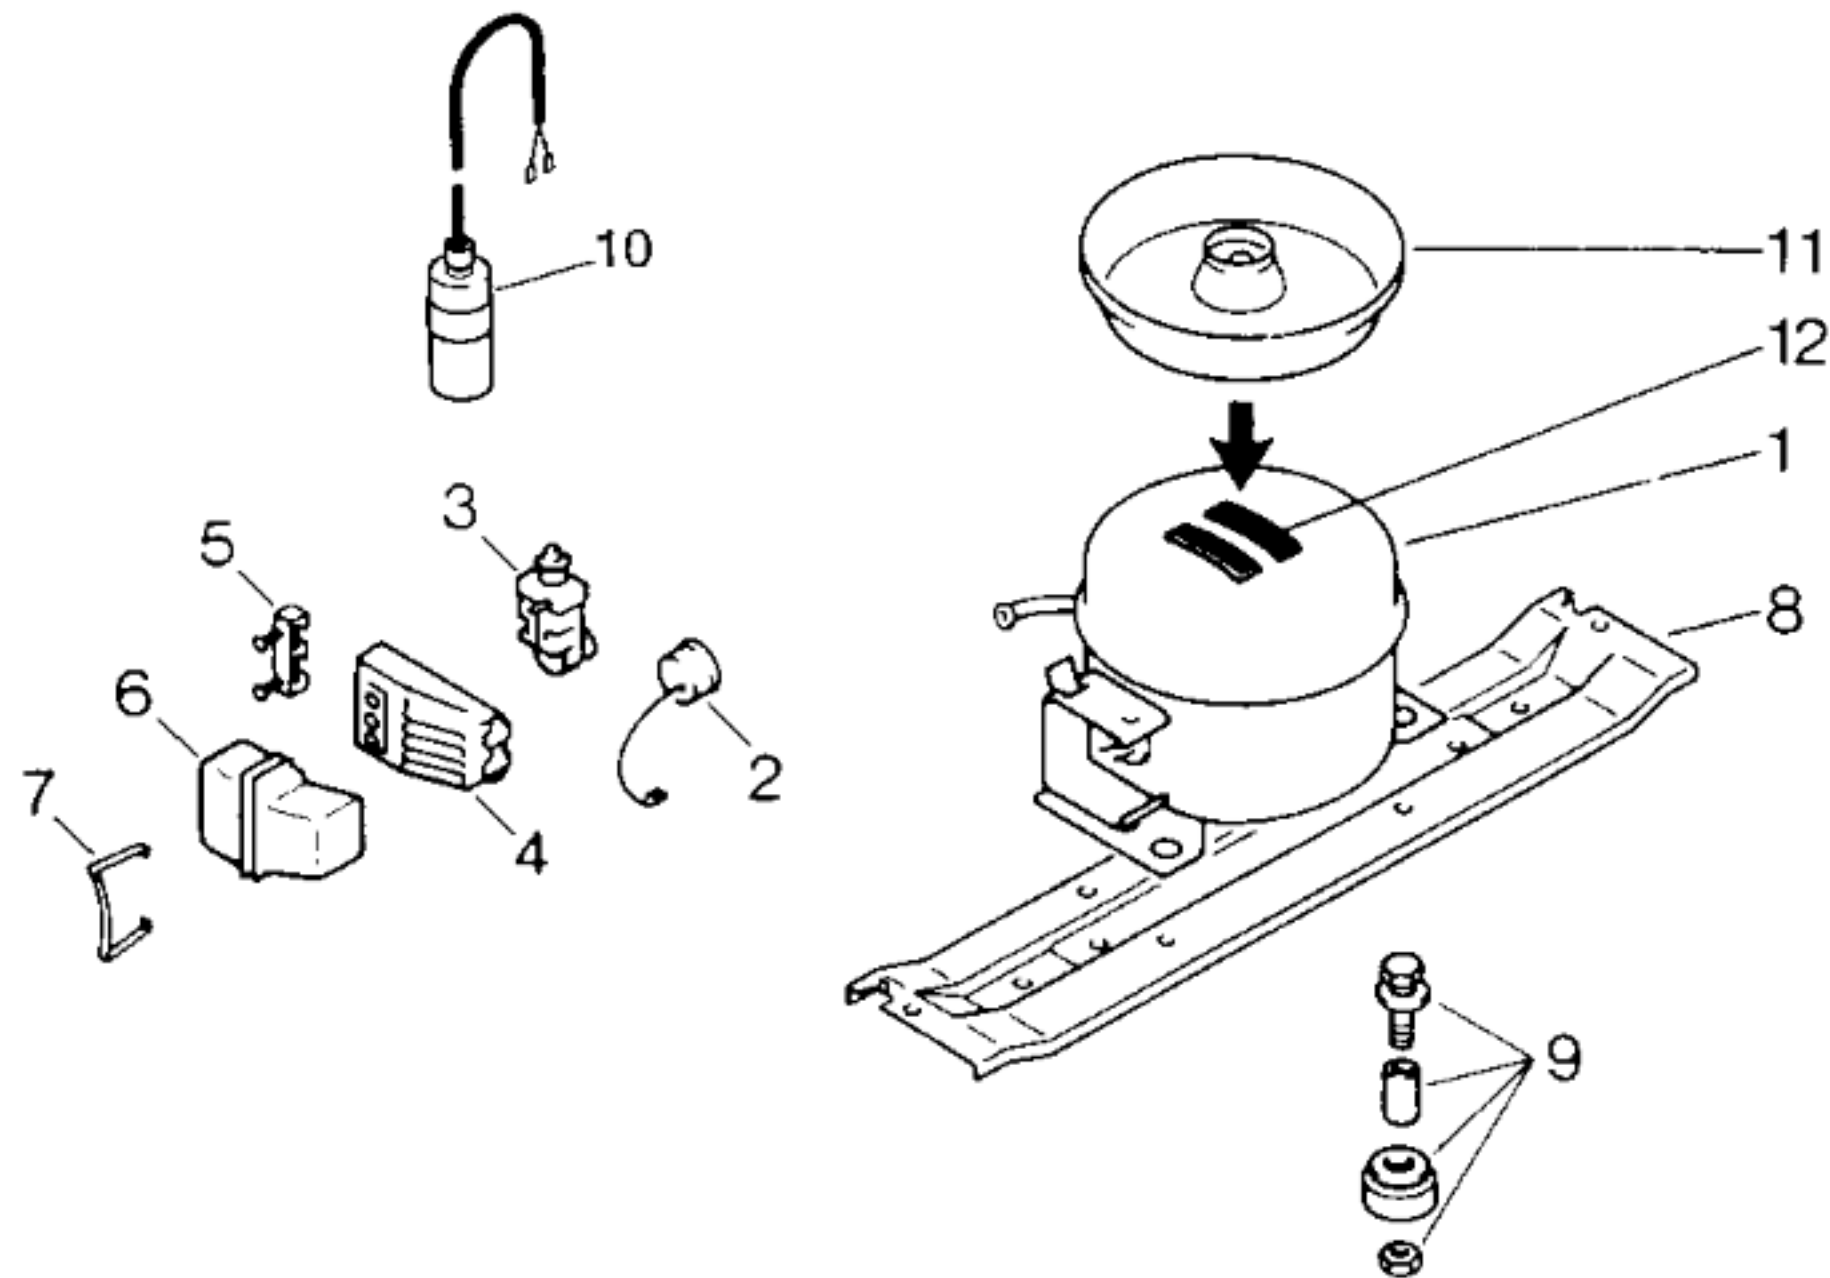

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Matsushita	
Typ/Type		D116LRAA	
Forderleistung/Delivery/Débit		l/h	1184
Anlaufstrom/Starting current/Cour. de démarrage		A	8,75
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	12,0
		Hi/aux Ω	28,7
Temp.-Regler/Thermostat		Ranco	
Typ/Type		K 59	
Reglerstellung/Position		kalt	warm
Schaltwerte/Switching values/		+ 4,5	+ 4,5
Valeurs de commutation		- 31,0	- 13,5
		(„abtauen“ od.)	„alarm“
Füllmenge/Fill.quantity/Charge		R12	g
		180	
Anschlußwert/Conn.load/Puiss. connectée		W	150
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance		Ω	8800
Leistung/Power/Puissance		W	5,5
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance		Ω	
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance		Ω	
Spannung/Voltage/Tension		V	

Pos.	Matsushita		
	D116LRAA		
1	14 0563		
2	05 8506		
3			
4			
5			
6	05 8458		
7	02 6731		
8	28 1825		
9	05 0166		
10	05 9467		
11	08 5182		
12	05 6008		