


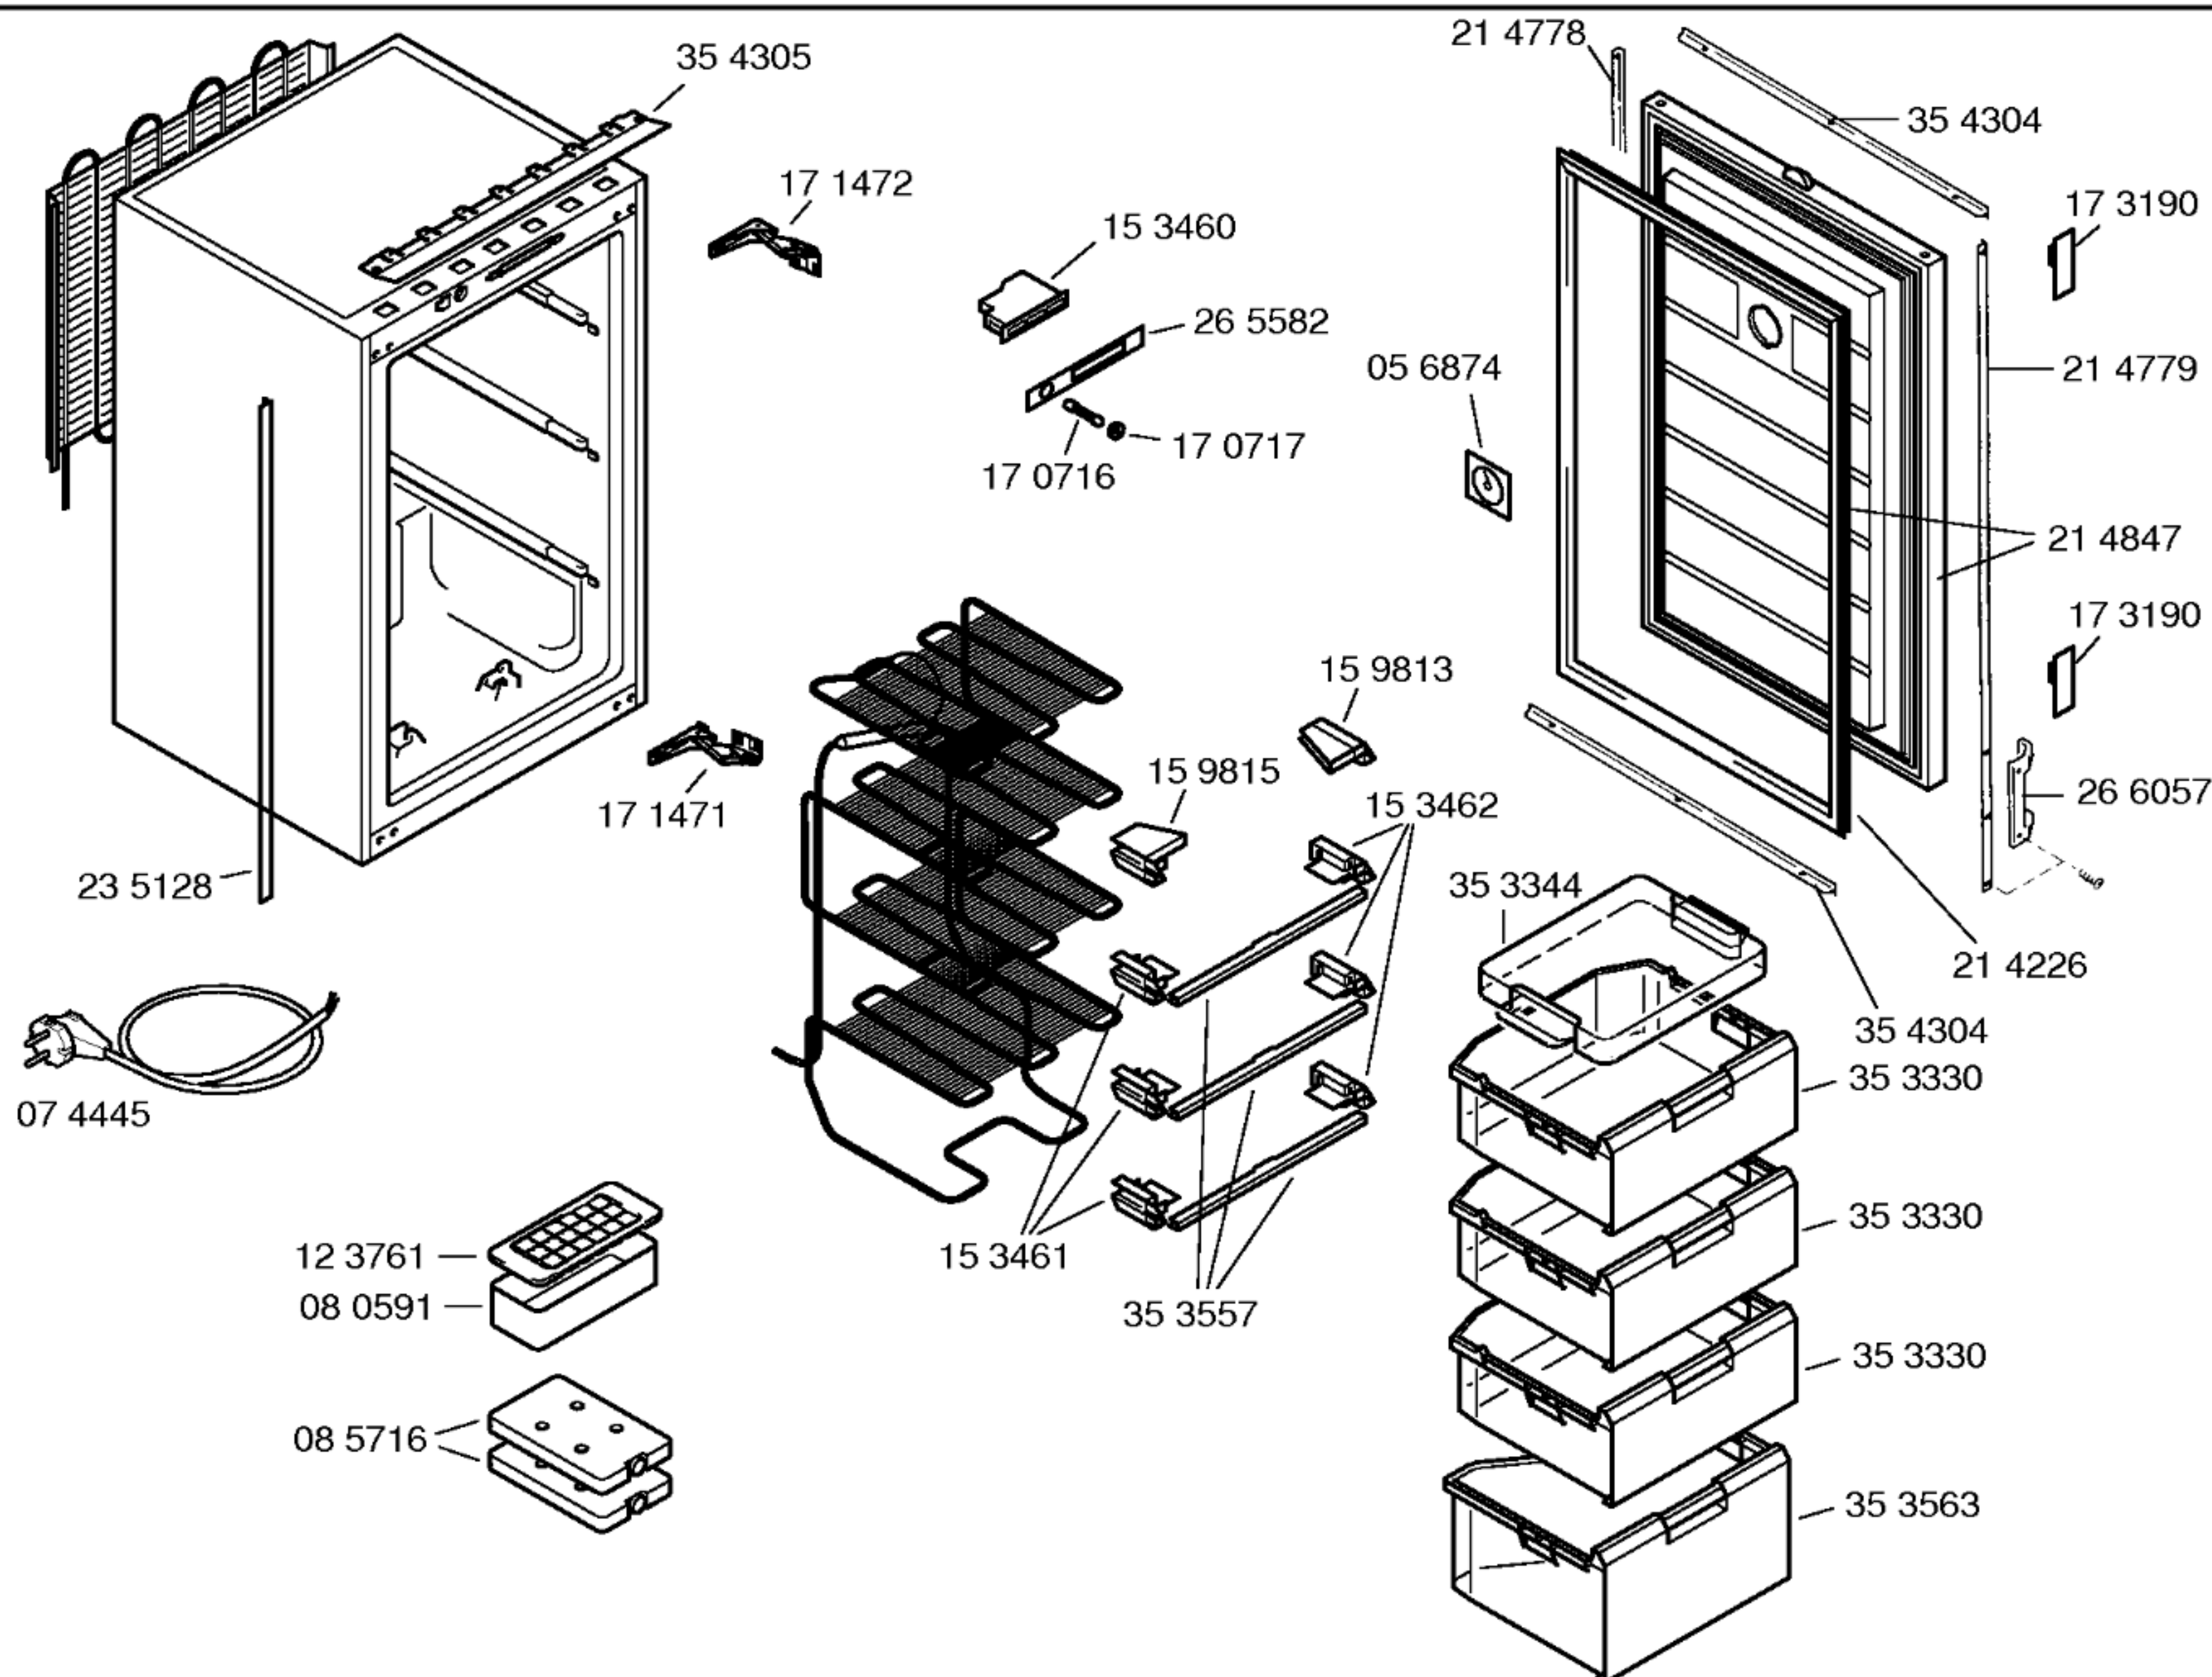

Gebrauchsanweisung
52 2708
(D,GB,F,I,NL)

Montageanleitung
52 3227
(D,GB,F,I,NL,DK,N,SF,
SE,TR)

Beistellsatz
26 6056

Temp.-Regler
Rep.-Satz
26 5271

Ausgleichsblenden
braun

KZ12880	37mm
KZ12890	41mm
KZ12800	57mm
ALU	


KZ12810	37mm
KZ12820	41mm
KZ12830	57mm

Dekorrahmen
braun
KSZ1248 1225mm

Torx-Schraube 3,5x16
für Dekorrahmen
17 3166

Türverkleidung
Edelstahl 1225mm
KSZ1024 Griff re.
KSZ1124 Griff li.

+

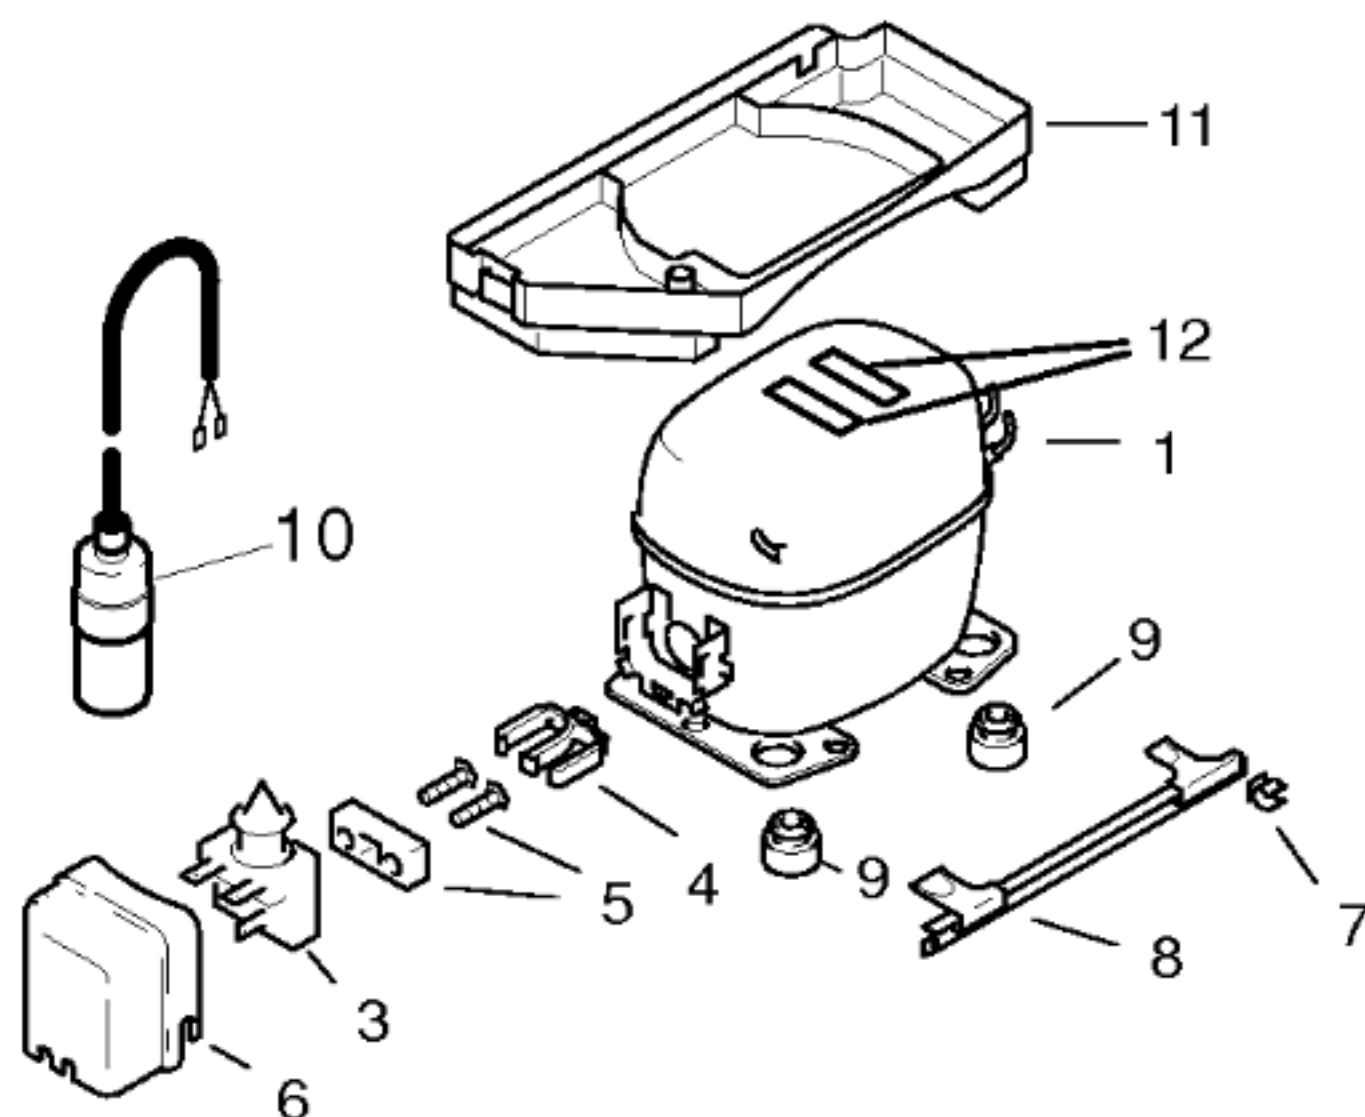

	V01	V02	
Pos.	Aspera	Goldstar	
	EMT 40 CLP	ND69NAEM	
1	14 1839	14 1999	
2			
3	17 1315	17 0743	
4		17 0746	
5	17 0882	17 0745	
6	17 0881	17 0744	
7	16 9319	16 9319	
8	26 4879	26 4879	
9	05 0166	05 0166	
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Goldstar	
Typ/Type		EMT 40 CLP	ND69NAEM	
Förderleistung/Delivery/Débit		l/h	1384	1242
Anlaufstrom/Starting current/Cour de démarrage		A	4,4	2,2
Widerstand/Resistance/Résistance		W	23,0	29,5
Hi/aux		W	23,0	21,0
Temp.-Regler/Thermostat		KER		
Typ/Type		RCO		
Regelstellung/Position		kalt	warm	
Schaltwerte/Switching values		ein"	-23,0	-15,0
Valeurs de commutation		aus"	-31,0	-21,0
Füllmenge/Fill.quantity/Charge		R600a	*	
Anschlußwert/Conn.load/Puiss. connectée		W	88	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		W		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		W		
Temp.-Regler/Thermostat				
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		W		
Spannung/Voltage/Tension		V		

* siehe Typenschild